


# 32-54COB

## LED SPOTLIGHT



<b>Housing</b>	Die-cast aluminum
<b>Diffuser</b>	PC lens
<b>Reflector</b>	Aluminum / Painted aluminum
<b>Light Source</b>	COB LED
<b>Benefits</b>	<ul style="list-style-type: none"> <li>- High brightness</li> <li>- Low cost</li> <li>- Energy saving</li> <li>- Uniformity in lighting</li> </ul>



**Painted Aluminum Reflector (Default)**



**Aluminum Reflector (Option)**



### DESCRIPTION

A recessed mounted, cost-effective, integrated LED spotlight module with good quality of light that's easy to suit any application.

### APPLICATION

Can be used in a wide range of applications from Residential to Commercial spaces.

### SPECIFICATION


	32-54COB 9W
LED Chip	Samsung / Philips
LED Driver	Philips
Wattage	9W
Lumen@Source*	1170 lm
Beam Angle	32°
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	50°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.





**POLAR DIAGRAM**

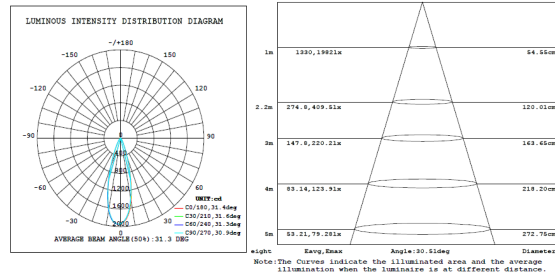

**ADDITIONAL OPTIONS**

- DALI Digital Dimming
- EL3 Emergency Kit - 3 hrs
- AL Aluminum Reflector

**SCHEMATIC**



ORDERING CODE	Ø	H	cut-out Ø
---------------	---	---	-----------


32-54COB	83	100	70
----------	----	-----	----

Dimensions are in mm

**ORDERING GUIDE**

32-54COB-9-830	9W
32-54COB-9-840	9W
32-54COB-9-865	9W

**ORDERING EXAMPLE**

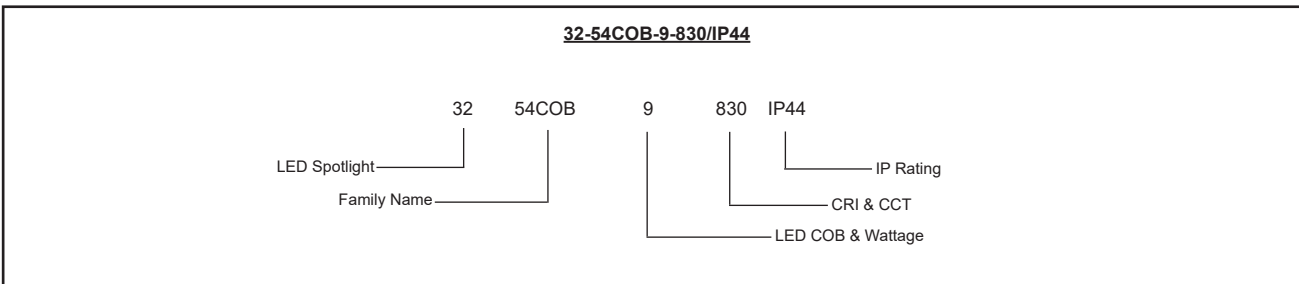

LED SPOTLIGHT 54COB-9-830/IP44

Data is subject to change without notice.