

52-CEILINGSTAR

LED CEILING LIGHT



Housing Steel body in chrome finish

Diffuser Opal glass

Light Source Lite-Tech LED module powered by Samsung / Lumiled

- Benefits**
- Easy to install
 - Energy efficient
 - Uniform illumination with high visual comfort
 - Provide a fresh design for home DIY renovation projects



DESCRIPTION

Ceilingstar provides efficient amount of light that can be evenly distributed throughout a room. Ceilingstar is great for ceiling clearance and it blends with the surrounding area. Not only it is more practical and energy efficient, but it also create a nice, bright, and inviting light into a room.

APPLICATION

Suitable in residential and office areas, kitchen, corridors, bathrooms, living rooms.

SPECIFICATION



	52-CEILINGSTAR 52310 20W	52-CEILINGSTAR 52410 36W
LED Chip	Samsung / Lumiled	Samsung / Lumiled
LED Driver	Philips	Philips
Wattage	20W	36W
Lumen@Source*	2600 lm	4680 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	50°C	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

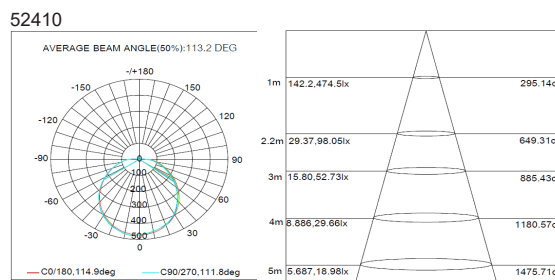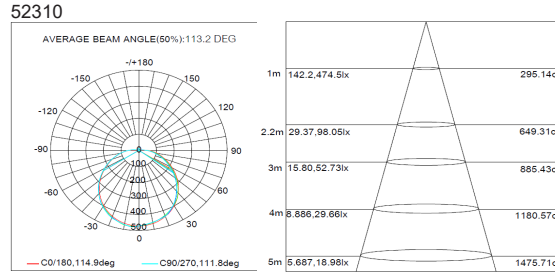

ADDITIONAL OPTIONS

EL3 Emergency Kit - 3 hrs (52410)

SCHEMATIC



ORDERING CODE	Ø	H
52-CEILINGSTAR-52310	310	85
52-CEILINGSTAR-52410	410	100


Dimensions are in mm

ORDERING GUIDE

52-CEILINGSTAR-52310-LT*20-830	20W	52-CEILINGSTAR-52410-LT*36-830	36W
52-CEILINGSTAR-52310-LT*20-840	20W	52-CEILINGSTAR-52410-LT*36-840	36W
52-CEILINGSTAR-52310-LT*20-865	20W	52-CEILINGSTAR-52410-LT*36-865	36W

- LT*
- LTS - SAMSUNG
 - LTP - LUMILED

ORDERING EXAMPLE

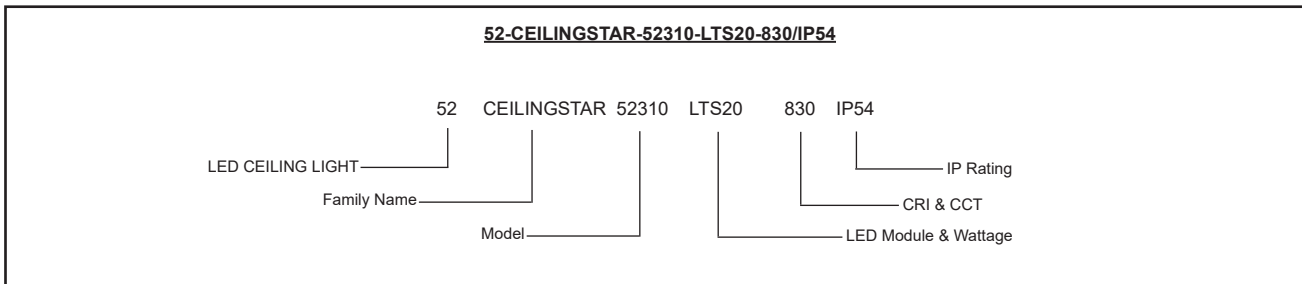

LED CEILING LIGHT CEILINGSTAR-52310-LTS20-830/IP54

Data is subject to change without notice.