

34-SAMPA 3

LED WEATHERPROOF



- Housing** Glass reinforced polyester (GRP) Base
- Diffuser** Opal polycarbonate
- Gear Tray** Steel white painted
- Clip** High quality steel clips
- Light Source** Lite-Tech LED module powered by Samsung / Lumiled
- Benefits**
 - No light pollution
 - High performance energy saving
 - High impact resistance housing cover
 - High quality plastic clips for tool free locking and opening system
 - UV stabilized material
 - Anti-yellowing property diffuser



POWERED BY PHILIPS DRIVER

DESCRIPTION

Highly efficient and reliable LED waterproof luminaire that offers an excellent quality of light, with a uniform light distribution without visible striping or color artefacts. Hassle-free installation and maintenance, with tool less access to the gear tray with built-in connectors.

APPLICATION

Provides general lighting solution for areas that require high degree of protection against dust and water such as Industrial areas, Warehouses / distribution centers, Parking garages, Cold storage facilities.

SPECIFICATION


	34-SAMPA 3 45W	34-SAMPA 3 60W
LED Chip	Samsung / Lumiled	Samsung / Lumiled
LED Driver	Philips	Philips
Wattage	45W	60W
Lumen@Source*	5850 lm	7800 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	50°C	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

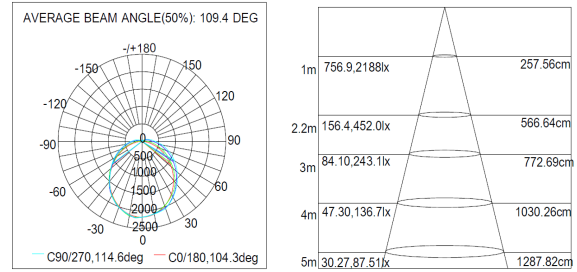

ADDITIONAL OPTIONS

- SUS** Suspension Kit
- EL3** Emergency Kit - 3 hrs
- MS** Motion Sensor

SCHEMATIC



ORDERING CODE	L	W	H
34-SAMPA 3	1312	172	105


Dimensions are in mm

ORDERING GUIDE

34-SAMPA 3-LT*45-830	45W	34-SAMPA 3-LT*60-830	60W
34-SAMPA 3-LT*45-840	45W	34-SAMPA 3-LT*60-840	60W
34-SAMPA 3-LT*45-865	45W	34-SAMPA 3-LT*60-865	60W

- LT*
- LTS - SAMSUNG
 - LTP - LUMILED

ORDERING EXAMPLE

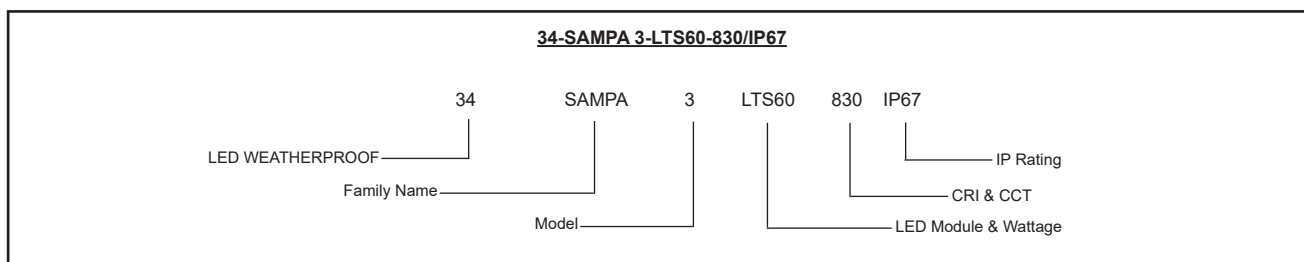

LED WEATHERPROOF SAMPA 3-LTS60-830/IP67

Data is subject to change without notice.