

# 30-LUKAS-LILI

## LED RECESSED MODULAR




**Housing** CRCA steel sheet epoxy polyester powder coated in white color RAL9016

**Diffuser** Polystyrene opal finish in double wing with middle decorated by perforation

**Light Source** Lite-Tech LED module powered by Samsung / Lumiled

- Benefits**
- Uniform soft light
  - No heat radiation
  - No mercury and UV rays
  - Cost effective system
  - Return on investment within 1.5 years

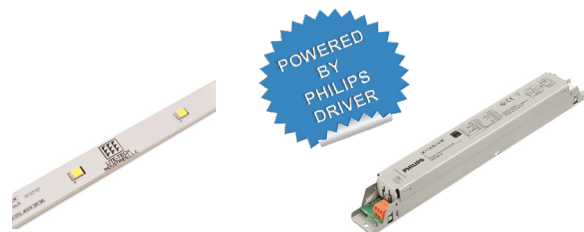

### DESCRIPTION

LUKAS-LILI is a recessed LED direct and indirect luminaire to replace T5 and PLL lamp with good energy saving. The soft illumination with low running cost provides comfortable atmosphere to the users.

### APPLICATION

Offices, libraries, computer rooms, education premises.

### SPECIFICATION


	<b>30-LUKAS-LILI 40W</b>
LED Chip	Samsung / Lumiled
LED Driver	Philips
Wattage	40W
Lumen@Source*	5200 lm
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	50°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.




**POLAR DIAGRAM**

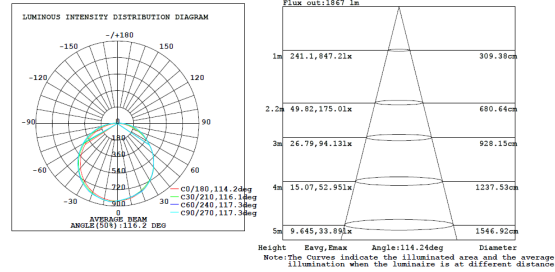

**ADDITIONAL OPTIONS**

- 1-10V Analog Dimming
- DALI Digital Dimming
- EL3 Emergency Kit - 3 hrs
- G Gypsum Ceiling
- M Metal Ceiling

**SCHEMATIC**



ORDERING CODE	LAY-IN/GYPSUM CEILING			GYPSUM CUT-OUT	METAL CEILING		
	L	W	H		L	W	H
30-LUKAS-LILI-40W	595	595	100	570X570	599	599	100

Dimensions are in mm




**ORDERING GUIDE**

30-LUKAS-LILI-LT*40-830	40W
30-LUKAS-LILI-LT*40-840	40W
30-LUKAS-LILI-LT*40-865	40W

- LT\*
- LTS - SAMSUNG
  - LTP - LUMILED

**ORDERING EXAMPLE**

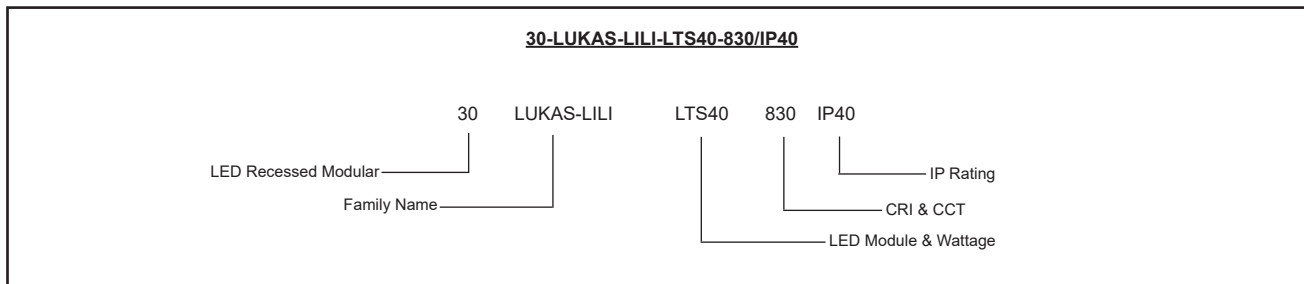

LED RECESSED MODULAR LUKAS-LILI-LTS40-830/IP40

Data is subject to change without notice.