


34-SAMPA 2

LED WEATHERPROOF

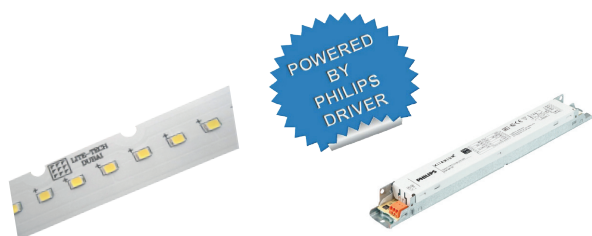

- Housing** Polycarbonate moulded base
- Diffuser** Opal polycarbonate
- Gear Tray** Steel white painted
- Light Source** Lite-Tech LED module powered by Samsung / Lumiled
- Benefits**
 - No light pollution
 - High performance energy saving
 - High impact resistance housing cover
 - High quality plastic clips for tool free locking and opening system
 - UV stabilized material
 - Anti-yellowing property diffuser

DESCRIPTION

Highly efficient and reliable LED waterproof luminaire that offers an excellent quality of light, with a uniform light distribution without visible striping or color artefacts. Hassle-free installation and maintenance, with tool less access to the gear tray with built-in connectors.

APPLICATION

Provides general lighting solution for areas that require high degree of protection against dust and water such as Industrial areas, Warehouses / distribution centers, Parking garages.

SPECIFICATION


	34-SAMPA 2 15W	34-SAMPA 2 30W	34-SAMPA 2 36W	34-SAMPA 2 45W	34-SAMPA 2 60W	34-SAMPA 2 70W
LED Chip	Samsung / Lumiled	Samsung / Lumiled	Samsung / Lumiled	Samsung / Lumiled	Samsung / Lumiled	Samsung / Lumiled
LED Driver	Philips	Philips	Philips	Philips	Philips	Philips
Wattage	15W	30W	36W	45W	60W	70W
Lumen@Source*	1950 lm	3900 lm	4680 lm	5850 lm	7800 lm	9100 lm
CCT**	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM	>80 and 3 SDCM	>80 and 3 SDCM	>80 and 3 SDCM	>80 and 3 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70	50,000 hrs / L70	50,000 hrs / L70	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	50°C	50°C	50°C	50°C	50°C	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%


Data is subject to change without notice.



POLAR DIAGRAM

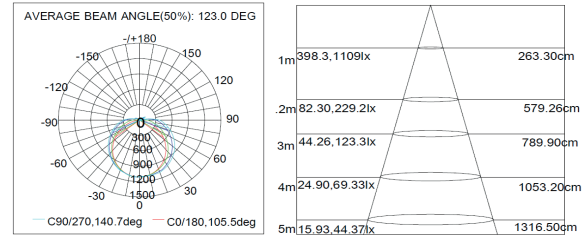

ADDITIONAL OPTIONS

- SUS Suspension Kit
 - EL3 Emergency Kit - 3 hrs
 - MS Motion Sensor
 - SS Stainless Steel clips
- 

SCHEMATIC



ORDERING CODE	L	W	H
34-SAMPA 2-15W	665	84	90
34-SAMPA 2-30W	665	134	90
34-SAMPA 2-36W	1275	84	90
34-SAMPA 2-45W	1275	134	90
34-SAMPA 2-60W	1275	134	90
34-SAMPA 2-70W	1575	134	90

Dimensions are in mm

ORDERING GUIDE


34-SAMPA 2-LT*15-830	15W	34-SAMPA 2-LT*36-830	36W	34-SAMPA 2-LT*60-830	60W
34-SAMPA 2-LT*15-840	15W	34-SAMPA 2-LT*36-840	36W	34-SAMPA 2-LT*60-840	60W
34-SAMPA 2-LT*15-865	15W	34-SAMPA 2-LT*36-865	36W	34-SAMPA 2-LT*60-865	60W
34-SAMPA 2-LT*30-830	30W	34-SAMPA 2-LT*45-830	45W	34-SAMPA 2-LT*70-830	70W
34-SAMPA 2-LT*30-840	30W	34-SAMPA 2-LT*45-840	45W	34-SAMPA 2-LT*70-840	70W
34-SAMPA 2-LT*30-865	30W	34-SAMPA 2-LT*45-865	45W	34-SAMPA 2-LT*70-865	70W

LT*

LTS - SAMSUNG

LTP - LUMILED

ORDERING EXAMPLE

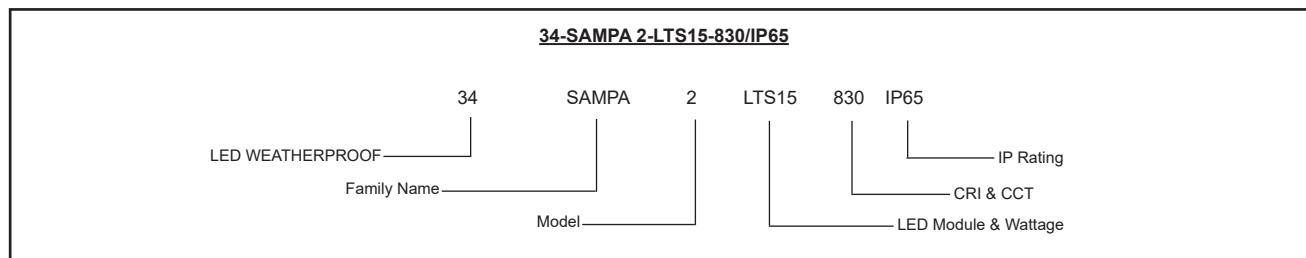

LED WEATHERPROOF SAMPA 2-LTS15-830/IP65

Data is subject to change without notice.