

40-GREENSTAR

LED AREA LIGHT



Housing	Die-cast aluminum
Diffuser	Clear PMMA
Light Source	Osram / Bridgelux
Benefits	<ul style="list-style-type: none"> - UV-proof powder coating finish - Thermostable silica gasket - High intensity and corrosion protected stainless steel fastener - High luminous efficiency - Energy efficient

DESCRIPTION

The GREENSTAR series combines the good looks with state-of-the-art performance and a design that meets the need of today's environment. It takes advantage to adapt on its surroundings to highlight the objective in conjunction with its maintenance-friendly features.

APPLICATION

Suitable for remote areas such as urban streets, parks, squares, gardens & villas.

SPECIFICATION


40-GREENSTAR 17825	
30W	
LED Chip	Osram / Bridgelux
LED Driver	Built-in
Wattage	30W
Lumen@Source*	3900 lm
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	55°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.



SCHEMATIC

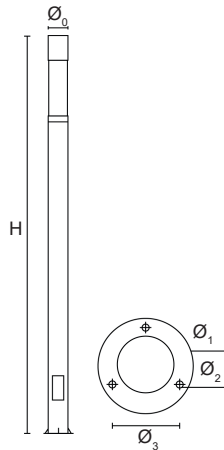

ORDERING CODE	H	Ø ₀
---------------	---	----------------

40-GREENSTAR-17825	3500	157
--------------------	------	-----

Dimensions are in mm

BASE


Ø ₁	Ø ₂	Ø ₃
----------------	----------------	----------------

265	20	185
-----	----	-----

ORDERING GUIDE

40-GREENSTAR-17825-30-830	30W
40-GREENSTAR-17825-30-840	30W
40-GREENSTAR-17825-30-865	30W

ORDERING EXAMPLE

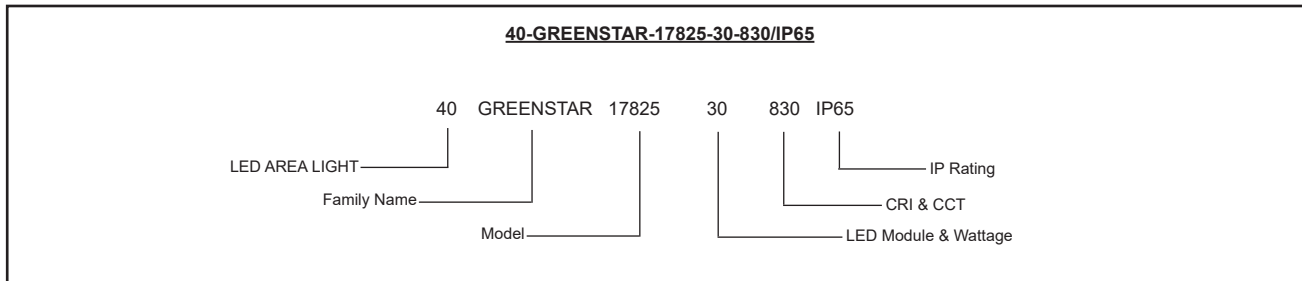

LED AREA LIGHT GREENSTAR-17825-30-830/IP65

Data is subject to change without notice.