

44-GROUNDSTAR

LED INGROUND



Housing	High pressure die-cast aluminum with stainless steel faceplate
Diffuser	Toughened glass
Light Source	Cree
Benefits	<ul style="list-style-type: none"> - Light body is designed to increase heat dissipation space - Instant on/off - Adjustable up to 15° - Surface has an anti-corrosion capability - 50% less power consumption than traditional light sources - Precise optic design provides exceptional light control and precise distribution of light
Option	RGB version available

DESCRIPTION

GROUNDSTAR series are robust and compact luminaires use for outdoor applications. It provides ground level illumination by having the lights pointed up from the ground. The intent of such lights is to highlight points in the outdoor places such as architectural features or guide lights for walkways or paths.

APPLICATION


This in-ground lights are mainly used for areas such as building façades, monuments, architectural marks, landscape.

SPECIFICATION


	44-GROUNDSTAR 2105 42W	44-GROUNDSTAR 2105 60W
LED Chip	Cree	Cree
LED Driver	Built-in	Built-in
LED Quantity	12 pcs	12 pcs
Wattage	42W	60W
Lumen@Source*	5040 lm	7200 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
Beam Angle	8° / 12° / 20° / 30° / 60°	8° / 12° / 20° / 30° / 60°
CRI (Ra)	>80	>80
LED Life	50,000 hrs	50,000 hrs
Working Ambient Temperature	55°C	55°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.

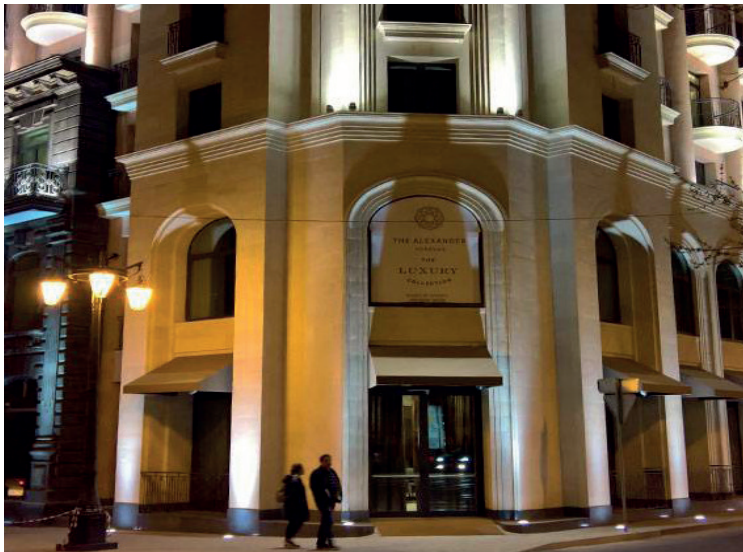

SCHEMATIC

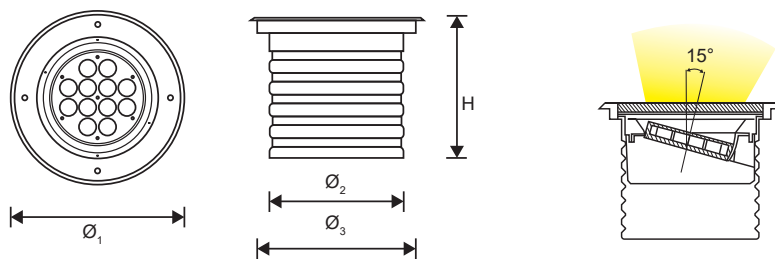


ORDERING CODE	Ø ₁	Ø ₂	Ø ₃	H
44-GROUNDSTAR 2105	330	243	301	265

Dimensions are in mm

ORDERING GUIDE

44-GROUNDSTAR 2105-42-830	42W	44-GROUNDSTAR 2105-60-830	60W
44-GROUNDSTAR 2105-42-840	42W	44-GROUNDSTAR 2105-60-840	60W
44-GROUNDSTAR 2105-42-865	42W	44-GROUNDSTAR 2105-60-865	60W

ORDERING EXAMPLE

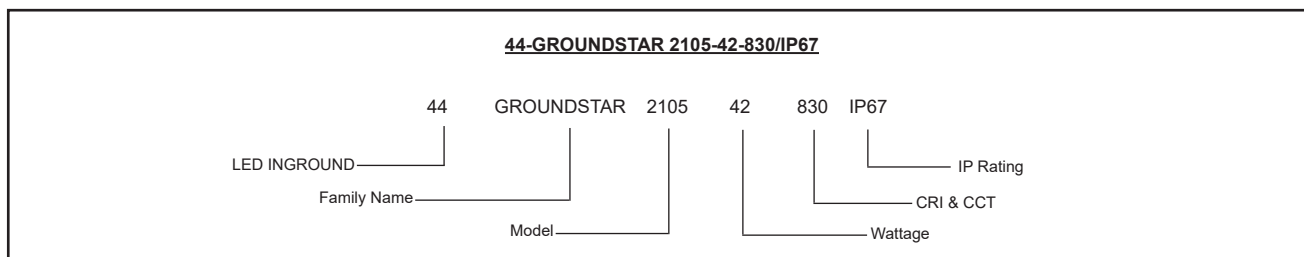

LED INGROUND GROUNDSTAR 2105-42-830/IP67

Data is subject to change without notice.