

44-GROUNDSTAR

LED INGROUND



Housing	High pressure die-cast aluminum with stainless steel faceplate
Diffuser	Toughened glass
Light Source	Cree
Benefits	<ul style="list-style-type: none"> - Light body is designed to increase heat dissipation space - Instant on/off - Surface has an anti-corrosion capability - 50% less power consumption than traditional light sources - Precise optic design provides exceptional light control and precise distribution of light
Option	RGB version available

DESCRIPTION

GROUNDSTAR series are robust and compact luminaires use for outdoor applications. It provides ground level illumination by having the lights pointed up from the ground. The intent of such lights is to highlight points in the outdoor places such as architectural features or guide lights for walkways or paths.

APPLICATION

This in-ground lights are mainly used for areas such as building façades, monuments, architectural marks, landscape.

SPECIFICATION


	44-GROUNDSTAR 2130 3.5W	44-GROUNDSTAR 2130 6W
LED Chip	Cree	Cree
LED Driver	DC 12V	DC 12V
LED Quantity	3 pcs	3 pcs
Wattage	3.5W	6W
Lumen@Source*	350 lm	600 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
Beam Angle	5° / 8° / 12.5° / 20° / 30° / 45° / 60°	5° / 8° / 12.5° / 20° / 30° / 45° / 60°
CRI (Ra)	>80	>80
LED Life	50,000 hrs	50,000 hrs
Working Ambient Temperature	55°C	55°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%


Data is subject to change without notice.



POLAR DIAGRAM

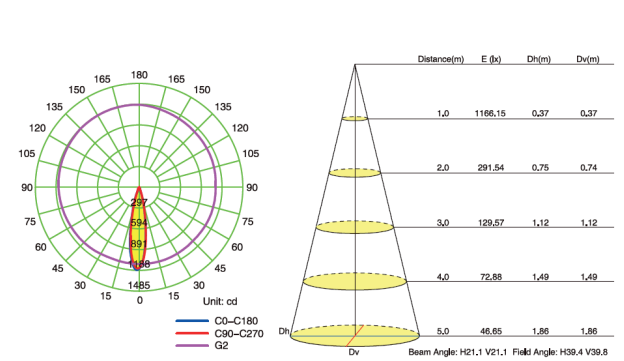

SCHEMATIC

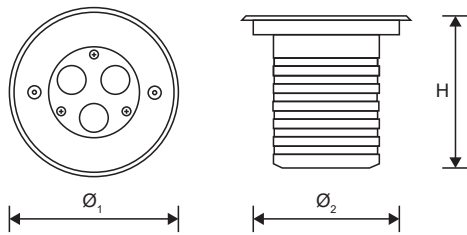

ORDERING CODE	Ø ₁	Ø ₂	H
---------------	----------------	----------------	---


44-GROUNDSTAR 2130	110	96	100
--------------------	-----	----	-----

Dimensions are in mm

ORDERING GUIDE

44-GROUNDSTAR 2130-3.5-830	3.5W	44-GROUNDSTAR 2130-6-830	6W
44-GROUNDSTAR 2130-3.5-840	3.5W	44-GROUNDSTAR 2130-6-840	6W
44-GROUNDSTAR 2130-3.5-865	3.5W	44-GROUNDSTAR 2130-6-865	6W

ORDERING EXAMPLE

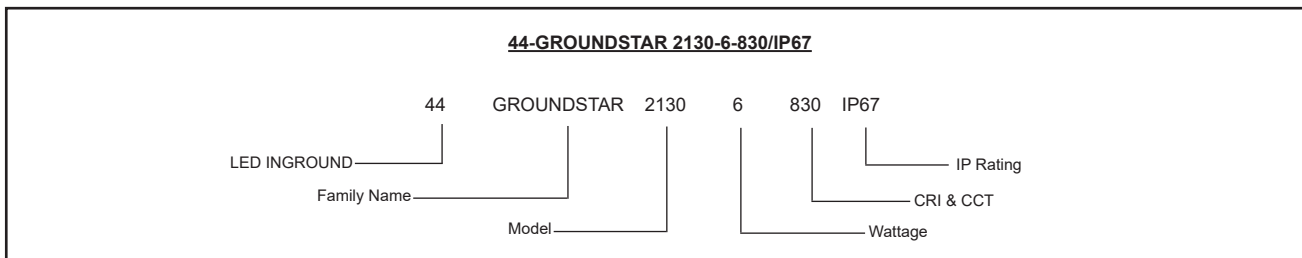

LED INGROUND GROUNDSTAR 2130-6-830/IP67

Data is subject to change without notice.