

33-VETON SLR

LED BATTEN



- Housing** CRCA steel sheet epoxy polyester powder coated in white color RAL9016
- Diffuser** High quality opal diffuser
- Light Source** Lite-Tech LED module powered by Samsung / Lumiled
- Benefits**
 - No light pollution
 - High performance energy saving
 - Flexible linear requirements
 - Environment-friendly



DESCRIPTION

LED batten lights are energy efficient, environment-friendly and durable as compared to fluorescent tube lights. It can lighten up large spaces with constant brightness, produce less heat, and flicker-free operation. It requires less current yet higher light output capacity compared to other sources and has a longer lifespan.

APPLICATION

Provides general lighting solution for areas such as supermarket, store rooms, industrial offices

SPECIFICATION


33-VETON SLR 36W	
Light Source	Samsung / Lumiled
LED Driver	Philips
Wattage	36W
Lumen@Source*	4680 lm
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

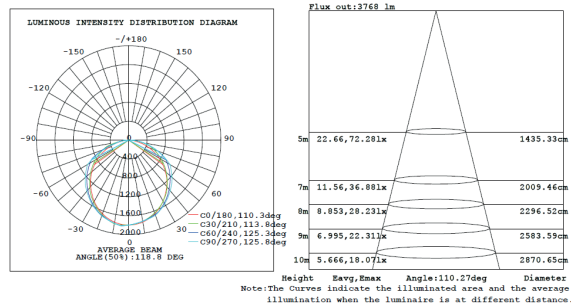

ADDITIONAL OPTIONS

EL3 Emergency Kit - 3 hrs

SCHEMATIC



ORDERING CODE

33-VETON SLR
Dimensions are in mm

L	W	H
1120	250	125

ORDERING GUIDE


33-VETON SLR-LT*36-830	36W
33-VETON SLR-LT*36-840	36W
33-VETON SLR-LT*36-865	36W

LT*

LTS - SAMSUNG

LTP - LUMILED

ORDERING EXAMPLE

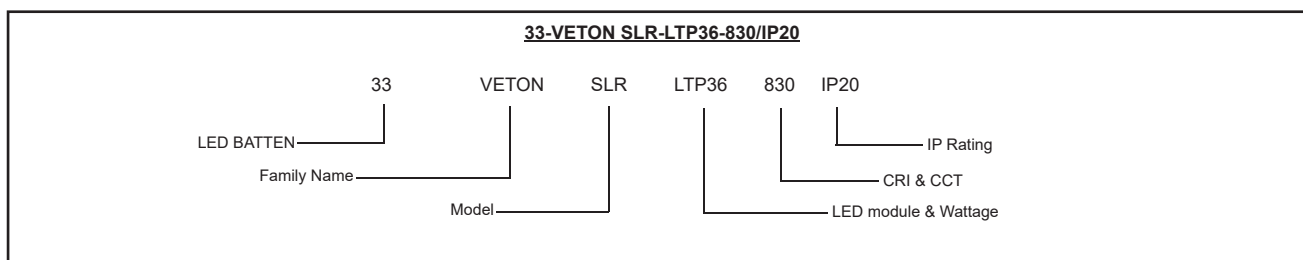

LED BATTEN VETON SLR-LTP36-830/IP20