

30-ARCHLED 6232

LED RECESSED MODULAR



- Housing** High purity extruded aluminum and anodized surface
- Diffuser** Frosted semi-opal polycarbonate roll diffuser for continuous mounting
- Light Source** Lite-Tech LED module powered by Samsung / Lumiled
- Benefits**
 - Aesthetic design
 - Comfortable lighting appearance
 - High efficacy
 - Good look in corporate office

DESCRIPTION

ARCHLED 6232 is an LED luminaire range that reflects the trend to miniaturization and architectural integration. Excellent optical performance using optical covers for optimum visual comfort and efficiency.

APPLICATION

Very versatile and can be used in a number of lighting applications such as office areas, Commercial spaces, corridors.

SPECIFICATION


	30-ARCHLED A06	6232	30-ARCHLED A10	6232	30-ARCHLED A12	6232	30-ARCHLED A15	6232	30-ARCHLED A18	6232
	15W	20W	20W	36W	30W	40W	45W	60W	60W	75W
LED Chip	Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled	
LED Driver	Philips		Philips		Philips		Philips		Philips	
Wattage	15W	20W	20W	36W	30W	40W	45W	60W	60W	75W
Lumen@Source*	1950 lm	2600 lm	2600 lm	4680 lm	3900 lm	5200 lm	5850 lm	7800 lm	7800 lm	9750 lm
CCT**	3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K	
CRI (Ra)	>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM	
LED Life	50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70	
Working Ambient Temperature	50°C		50°C		50°C		50°C		50°C	

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

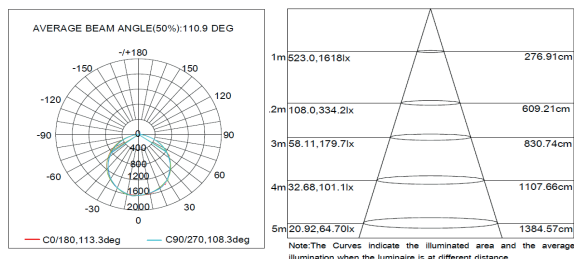

ADDITIONAL OPTIONS

- 1-10V Analog Dimming
- DALI Digital Dimming
- EL3 Emergency Kit - 3hrs

SCHEMATIC

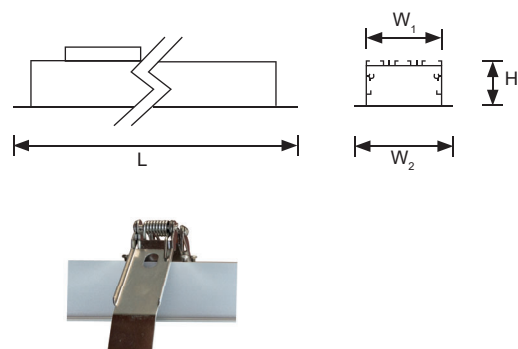

ORDERING CODE

ORDERING CODE	L	W ₁	W ₂	H
30-ARCHLED 6232-A06	600	50	62	32
30-ARCHLED 6232-A10	1000	50	62	32
30-ARCHLED 6232-A12	1200	50	62	32
30-ARCHLED 6232-A15	1500	50	62	32
30-ARCHLED 6232-A18	1800	50	62	32


Dimensions are in mm

ORDERING GUIDE

30-ARCHLED 6232-A06-LT*15	830	840	865	15W	30-ARCHLED 6232-A18-LT*60	830	840	865	60W
30-ARCHLED 6232-A06-LT*20	830	840	865	20W	30-ARCHLED 6232-A18-LT*75	830	840	865	75W
30-ARCHLED 6232-A10-LT*20	830	840	865	20W					
30-ARCHLED 6232-A10-LT*36	830	840	865	36W					
30-ARCHLED 6232-A12-LT*30	830	840	865	30W					
30-ARCHLED 6232-A12-LT*40	830	840	865	40W					
30-ARCHLED 6232-A15-LT*45	830	840	865	45W					
30-ARCHLED 6232-A15-LT*60	830	840	865	60W					

- LT*
- LTS - SAMSUNG
 - LTP - LUMILED

ORDERING EXAMPLE

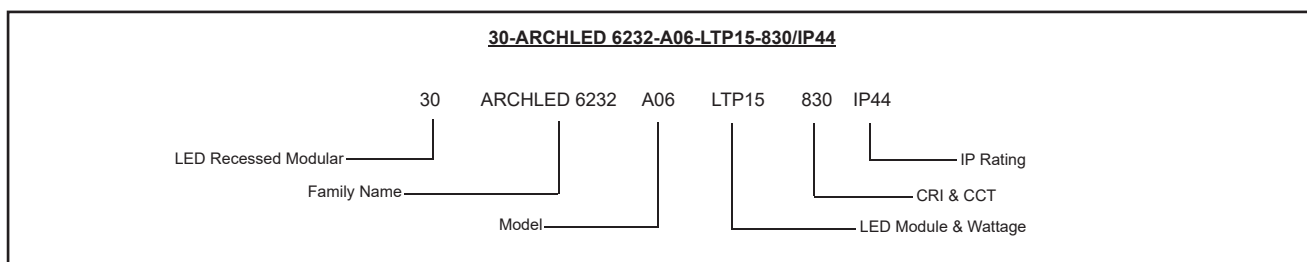

LED RECESSED MODULAR ARCHLED 6232-A06-LTP15-830/IP44