

30-ARCHLED 9035

LED RECESSED MODULAR



- Housing

High purity extruded aluminum and anodized surface
- Diffuser

Frosted semi-opal polycarbonate
- Light Source

Lite-Tech LED module powered by Samsung / Lumiled
- Benefits

- Aesthetic design

- Comfortable lighting appearance

- High efficacy

- Good look in corporate office



DESCRIPTION

ARCHLED 9035 is an LED luminaire range that reflects the trend to miniaturization and architectural integration. Excellent optical performance using optical covers for optimum visual comfort and efficiency.

APPLICATION

Very versatile and can be used in a number of lighting applications such as office areas, Commercial spaces, corridors.

SPECIFICATION


	30-ARCHLED A06	9035	30-ARCHLED A12	9035	30-ARCHLED A15	9035	30-ARCHLED A18	9035	30-ARCHLED A24	9035
	15W	20W	30W	40W	45W	60W	60W	75W	100W	
LED Chip	Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled	
LED Driver	Philips		Philips		Philips		Philips		Philips	
Wattage	15W	20W	30W	40W	45W	60W	60W	75W	100W	
Lumen@Source*	1950 lm	2600 lm	3900 lm	5200 lm	5850 lm	7800 lm	7800 lm	9750 lm	13000 lm	
CCT**	3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K	
CRI (Ra)	>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM	
LED Life	50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70	
Working Ambient Temperature	50°C		50°C		50°C		50°C		50°C	

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

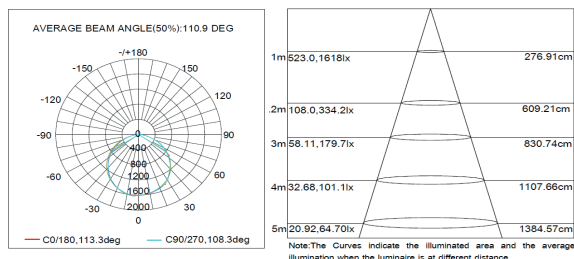

ADDITIONAL OPTIONS

- ☐ 1-10V Analog Dimming
- ☐ DALI Digital Dimming
- ☐ EL3 Emergency Kit - 3hrs

SCHEMATIC

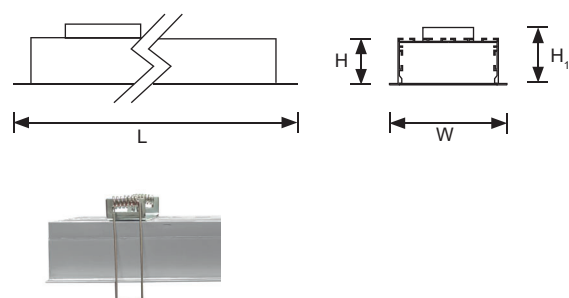

ORDERING CODE	L	W	H	H ₁
30-ARCHLED 9035-A06	600	90	35	58
30-ARCHLED 9035-A12	1200	90	35	58
30-ARCHLED 9035-A15	1500	90	35	58
30-ARCHLED 9035-A18	1800	90	35	58
30-ARCHLED 9035-A24	2400	90	35	58

Dimensions are in mm

ORDERING GUIDE

30-ARCHLED 9035-A06-LT*15	830	840	865	15W	30-ARCHLED 9035-A18-LT*60	830	840	865	60W
30-ARCHLED 9035-A06-LT*20	830	840	865	20W	30-ARCHLED 9035-A18-LT*75	830	840	865	75W
30-ARCHLED 9035-A12-LT*30	830	840	865	30W	30-ARCHLED 9035-A24-LT*100	830	840	865	100W
30-ARCHLED 9035-A12-LT*40	830	840	865	40W					
30-ARCHLED 9035-A15-LT*45	830	840	865	45W					
30-ARCHLED 9035-A15-LT*60	830	840	865	60W					

LT*

LTS - SAMSUNG

LTP - LUMILED

ORDERING EXAMPLE

30-ARCHLED 9035-A06-LTP15-830/IP44

LED Recessed Modular — 30

Family Name — ARCHLED 9035

Model — A06

LTP15 — LED Module & Wattage

830 — CRI & CCT

IP44 — IP Rating

LED RECESSED MODULAR ARCHLED 9035-A06-LTP15-830/IP44