

# 30-SNOWPRO

## LED RECESSED MODULAR




**Housing** CRCA steel sheet epoxy polyester powder coated in white color RAL9016

**Diffuser** High quality opal diffuser increases light transmission and eliminates pixelization.

**Light Source** Lite-Tech LED module powered by Samsung / Lumiled

- Benefits**
- Integrated LED Technology
  - Homogeneous light output in low depth of housing
  - Easiest method of thermal management
  - Slim square housing
  - Operational cost savings

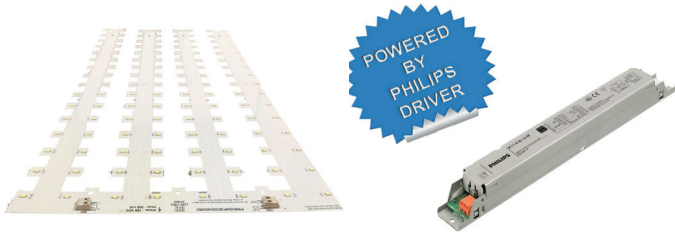

### DESCRIPTION

SNOWPRO luminaire assembled with double square LED module delivering high energy efficiency compared with the fluorescent and visually appealing without being intrusive. Suitable for T-Grid ceiling, gypsum ceiling, and metal ceiling.

### APPLICATION

For innovative prestigious lighting or auxiliary lighting in retail areas, foyers, corridors, office areas, conference rooms, hotels, restaurants and living spaces.

### SPECIFICATION



	30-SNOWPRO 36W	30-SNOWPRO 36W 4X1	30-SNOWPRO 75W - 4X2
LED Chip	Samsung / Lumiled	Samsung / Lumiled	Samsung / Lumiled
LED Driver	Philips	Philips	Philips
Wattage	36W	36W	75W
Lumen@Source*	4680 lm	4680 lm	9750 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM	>80 and 3 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	50°C	50°C	50°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.




**POLAR DIAGRAM**

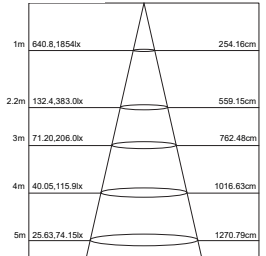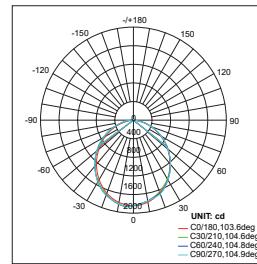

**ADDITIONAL OPTIONS**

- 1-10V Analog Dimming
- DALI Digital Dimming
- EL3 Emergency Kit - 3 hrs
- G Gypsum Ceiling
- M Metal Ceiling

**SCHEMATIC**

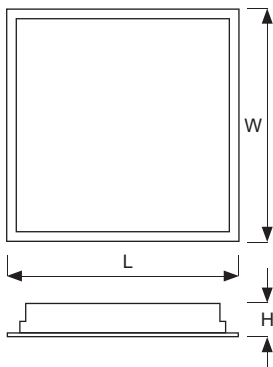

ORDERING CODE	LAY-IN/GYPSUM CEILING			GYPSUM CUT-OUT	METAL CEILING		
	L	W	H		L	W	H
30-SNOWPRO-36W	595	595	65	570X570	599	599	65
30-SNOWPRO-36W 4X1	1195	295	65	1170X270	1199	299	65
30-SNOWPRO-75W 4X2	1195	595	65	1170X570	1199	599	65


Dimensions are in mm



**ORDERING GUIDE**

30-SNOWPRO-LT*36-	830	840	865		LT*
30-SNOWPRO-LT*36-	830	840	865	4X1	LTS - SAMSUNG
30-SNOWPRO-LT*75-	830	840	865	4X2	LTP - LUMILED

**ORDERING EXAMPLE**

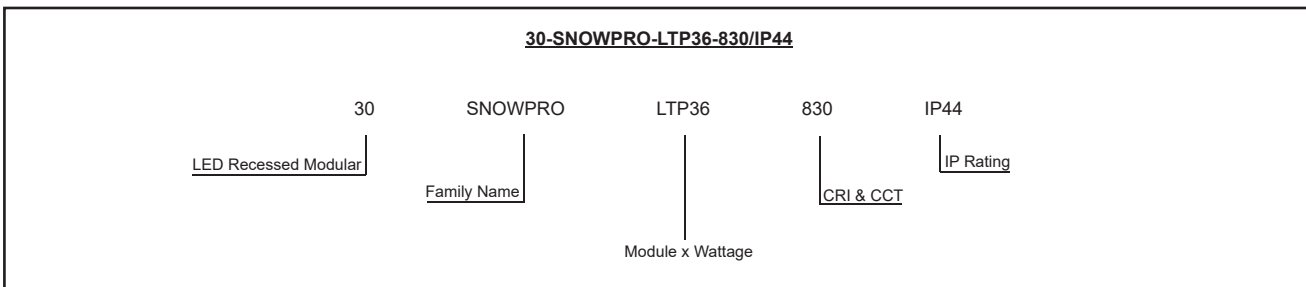

LED RECESSED MODULAR SNOWPRO-LTP36-830/IP44