



31-ARCHLED 5075

LED SURFACE

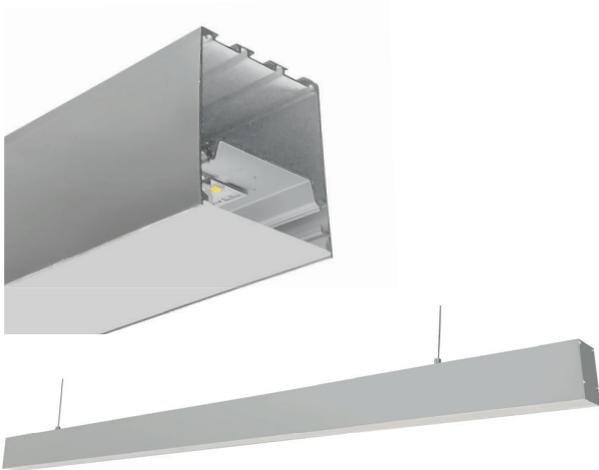

- Housing** High purity extruded aluminum and anodized surface
- Diffuser** Frosted semi-opal polycarbonate
- Light Source** Lite-Tech LED module powered by Samsung / Lumiled
- Benefits**
 - Aesthetic design
 - Comfortable lighting appearance
 - High efficacy
 - Good look in corporate office



DESCRIPTION

The ARCHLED 5075 Linear Light Fixture is an extremely versatile solution for many indoor lighting needs. It is scalable sheet fixtures that can be both added to and moved along and are available in various lengths. Applicable in areas that require high performance such as galleries and retail areas. With a state of the art manufacturing process which convert this luminaire as a linear continuous mounting.

APPLICATION


Very versatile and can be used in a number of lighting applications such as office areas, Commercial spaces, corridors.

SPECIFICATION



	31-ARCHLED 5075 A06		31-ARCHLED 5075 A12		31-ARCHLED 5075 A15		31-ARCHLED 5075 A18		31-ARCHLED 5075 A24	
	15W	20W	30W	40W	45W	60W	60W	75W	100W	
LED Chip	Samsung / Lumiled		Samsung / Lumiled							
LED Driver	Philips		Philips		Philips		Philips		Philips	
Wattage	15W	20W	30W	40W	45W	60W	60W	75W	100W	
Lumen@Source*	1950 lm	2600 lm	3900 lm	5200 lm	5850 lm	7800 lm	7800 lm	9750 lm	13000 lm	
CCT**	3000K / 4000K / 6500K		3000K / 4000K / 6500K							
CRI (Ra)	>80 and 3 SDCM		>80 and 3 SDCM							
LED Life	50,000 hrs / L70		50,000 hrs / L70							
Working Ambient Temperature	50°C		50°C		50°C		50°C		50°C	

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.

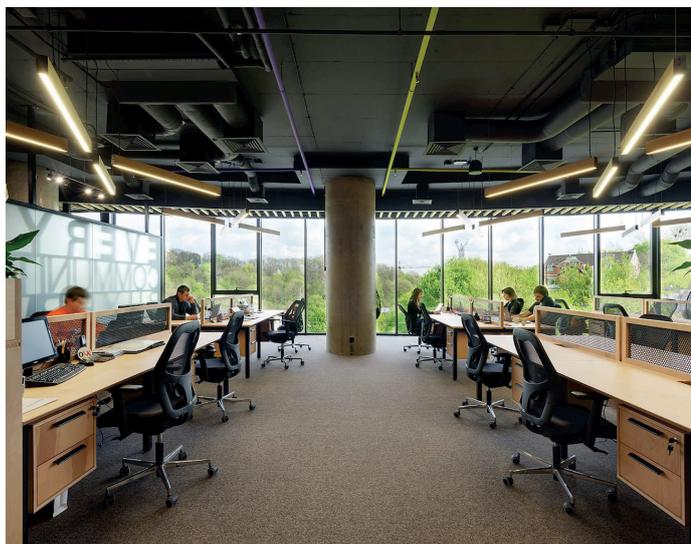


POLAR DIAGRAM



ADDITIONAL OPTIONS

- 1-10V Analog Dimming
- DALI Digital Dimming
- EL3 Emergency Kit - 3hrs
- CM Accessories for continuous mounting
- SUS Suspension Kit
- White

SCHEMATIC

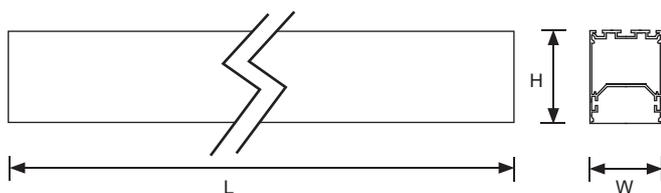

ORDERING CODE


ORDERING CODE	L	W	H
31-ARCHLED 5075-A06	600	50	75
31-ARCHLED 5075-A12	1200	50	75
31-ARCHLED 5075-A15	1500	50	75
31-ARCHLED 5075-A18	1800	50	75
31-ARCHLED 5075-A24	2400	50	75

Dimensions are in mm

ORDERING GUIDE

31-ARCHLED 5075-A06-LT*15	830	840	865	15W	31-ARCHLED 5075-A18-LT*60	830	840	865	60W
31-ARCHLED 5075-A06-LT*20	830	840	865	20W	31-ARCHLED 5075-A18-LT*75	830	840	865	75W
31-ARCHLED 5075-A12-LT*30	830	840	865	30W	31-ARCHLED 5075-A24-LT*100	830	840	865	100W
31-ARCHLED 5075-A12-LT*40	830	840	865	40W					
					LT*				
31-ARCHLED 5075-A15-LT*45	830	840	865	45W	LTS - SAMSUNG				
31-ARCHLED 5075-A15-LT*60	830	840	865	60W	LTP - LUMILED				

ORDERING EXAMPLE

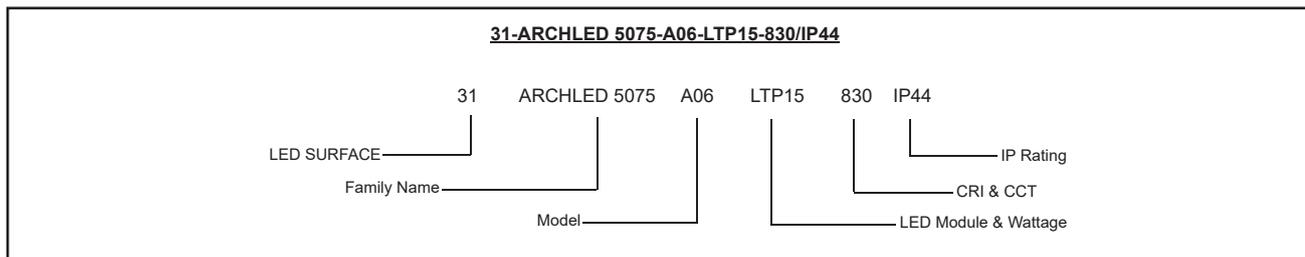

LED SURFACE ARCHLED 5075-A06-LTP15-830/IP44

Data is subject to change without notice.