

Round (R)



Square (S)

Housing	Aluminum alloy
Reflector	Aluminum
Diffuser	Clear acrylic PC
Light Source	COB LED
Benefits	<ul style="list-style-type: none"> - Breakthrough system cost - Good quality and light performance - Available in round and square options



DESCRIPTION

A recessed mounted, cost-effective, integrated LED spotlight module with good quality of light that's easy to suit any application.

APPLICATION

Can be used in a wide range of applications from Residential to Commercial spaces.

SPECIFICATION


32-27COB	
9W	
LED Chip	Samsung / Philips
LED Driver	Philips
Wattage	9W
Lumen@Source*	1170 lm
Beam Angle	22°
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.





POLAR DIAGRAM

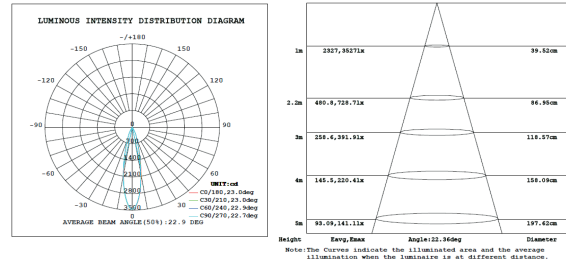

ADDITIONAL OPTIONS

- DALI Digital Dimming
- EL3 Emergency Kit - 3 hrs

SCHEMATIC



ORDERING CODE	Ø	H	cut-out Ø
32-27COB-R	85	95	75


Dimensions are in mm

ORDERING CODE	L	W	H	cut-out LXW
32-27COB-S	85	85	95	75

ORDERING GUIDE

32-27COB-R-9-830	9W	32-27COB-S-9-830	9W
32-27COB-R-9-840	9W	32-27COB-S-9-840	9W
32-27COB-R-9-865	9W	32-27COB-S-9-865	9W

ORDERING EXAMPLE

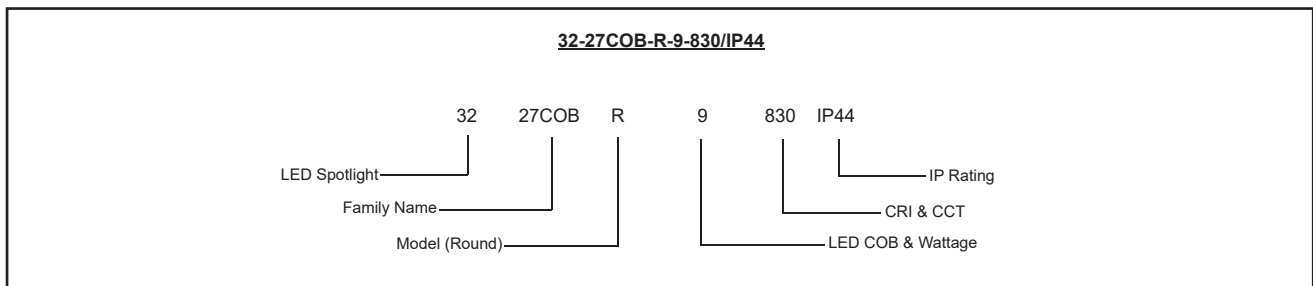

LED SPOTLIGHT 27COB-9-830/IP44

Data is subject to change without notice.