


32-55COB

LED SPOTLIGHT



Housing	Die-cast aluminum
Diffuser	Polycarbonate
Reflector	Aluminum / White painted aluminum
Light Source	COB LED
Benefits	<ul style="list-style-type: none"> - High brightness - Uniformity in lighting - Low cost - Energy saving - Easy to install



DESCRIPTION

A recessed mounted, cost-effective, integrated LED spotlight module with good quality of light that's easy to suit any application.

APPLICATION

Can be used in a wide range of applications from Residential to Commercial spaces.

SPECIFICATION


32-55COB	
9W	
LED Chip	Samsung / Philips
LED Driver	Philips
Wattage	9W
Lumen@Source*	1170 lm
Beam Angle	37°
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

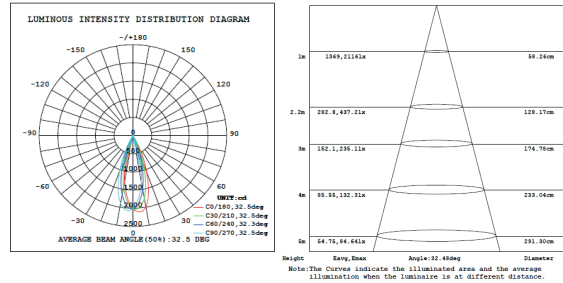

ADDITIONAL OPTIONS

- DALI Digital Dimming
- EL3 Emergency Kit - 3 hrs

SCHEMATIC



ORDERING CODE	Ø	H	cut-out Ø
---------------	---	---	-----------


32-55COB	85	80	75
----------	----	----	----

Dimensions are in mm

ORDERING GUIDE

32-55COB-9-830	9W
32-55COB-9-840	9W
32-55COB-9-865	9W

ORDERING EXAMPLE

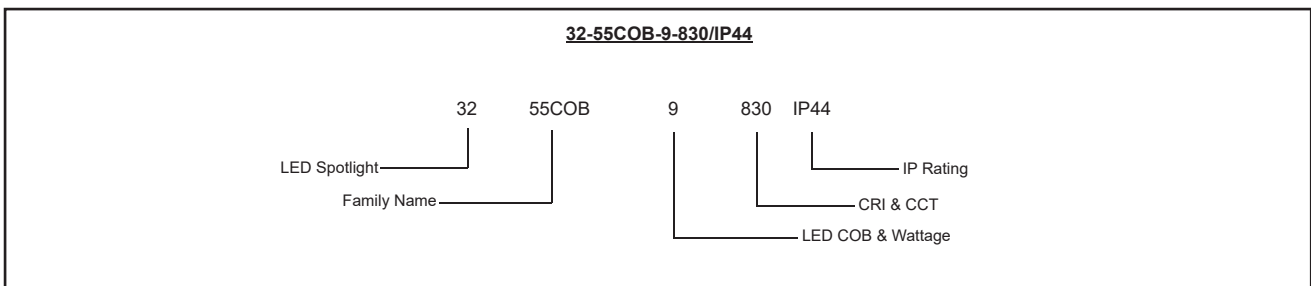

LED SPOTLIGHT 55COB-9-830/IP44