

32-MINICOB D30

LED MINI SPOT LIGHT



Housing	Aluminum alloy
Finish	White / Black
Light Source	Bridgelux
Benefits	- Breakthrough system cost - Good quality and light performance - low profile

DESCRIPTION

A recessed mounted, low profile and light wieght spot light brings atmospheric illumination to specific type of areas. With its low wattage and smaller size, it can be used as an accent to create a starry-like ceilings

APPLICATION


Good for low profile lighting such as kitchen counter tops, head bed area, cabinets, shelves.

SPECIFICATION


	32-MINICOB D30 1W	32-MINICOB D30 3W
LED Chip	Bridgelux	Bridgelux
Wattage	1W	3W
Lumen@Source*	60 lm	180 lm
Beam Angle	15° / 24°	15° / 24°
CCT**	2700K / 3000K / 4000K	2700K / 3000K / 4000K
CRI (Ra)	>90	>90
LED Life	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	50°C	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.

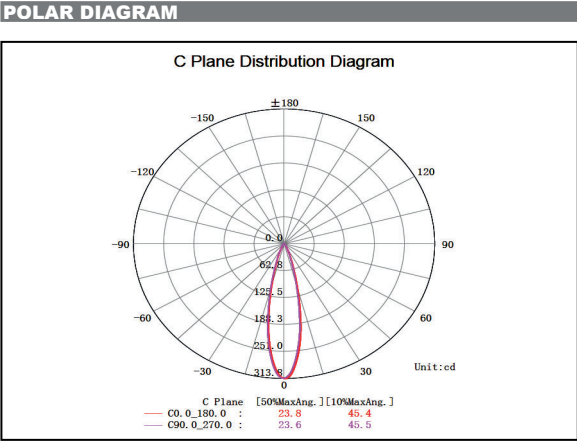

SCHEMATIC




ORDERING CODE	Ø	H	cut-out Ø
32-MINICOB-D30	30	72	25

Dimensions are in mm

ORDERING GUIDE

32-MINICOB-D30-1-927	1W	32-MINICOB-D30-3-927	3W
32-MINICOB-D30-1-930	1W	32-MINICOB-D30-3-930	3W
32-MINICOB-D30-1-940	1W	32-MINICOB-D30-3-940	3W

ORDERING EXAMPLE

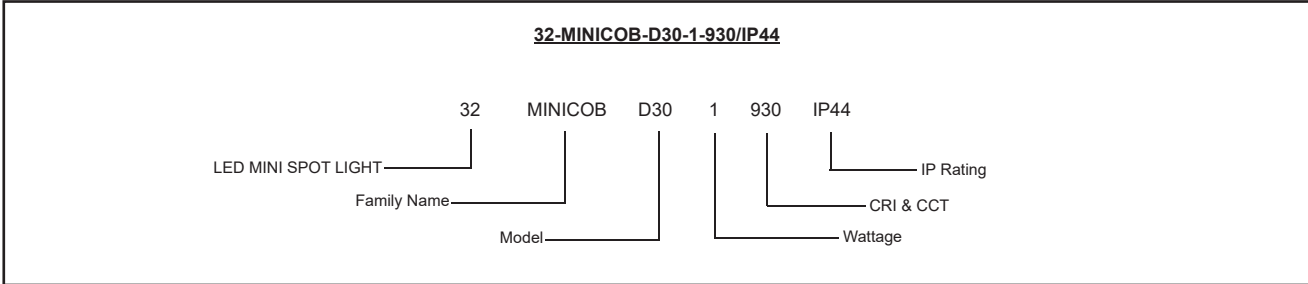

LED MINI SPOT LIGHT MINICOB-D30-1-930/IP44