

# 40-GREENSTAR

## LED AREA LIGHT



<b>Housing</b>	Die-cast aluminum
<b>Diffuser</b>	Clear PC
<b>Reflector</b>	Anodized high pure aluminum
<b>Light Source</b>	Osram / Bridgelux
<b>Benefits</b>	<ul style="list-style-type: none"> <li>- UV-proof powder coating finish</li> <li>- High intensity and corrosion protected stainless steel fastener</li> <li>- High luminous efficiency</li> <li>- Energy efficient</li> </ul>

### DESCRIPTION

The GREENSTAR series combines the good looks with state-of-the-art performance and a design that meets the need of today's environment. It takes advantage to adapt on its surroundings to highlight the objective in conjunction with its maintenance-friendly features.

### APPLICATION


Suitable for outdoor areas such as urban streets, parks, squares, gardens & villas.

### SPECIFICATION


40-GREENSTAR 16001	
30W	
LED Chip	Osram / Bridgelux
LED Driver	Built-in
Wattage	30W
Lumen@Source*	3900 lm
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	55°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.

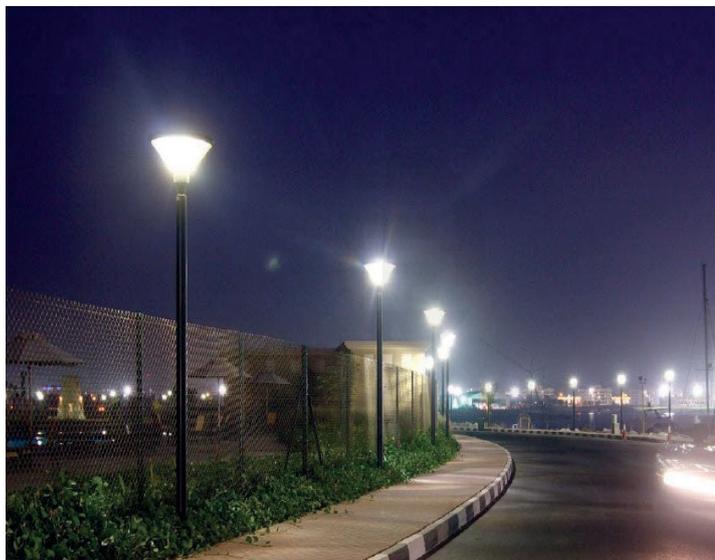

**SCHEMATIC**

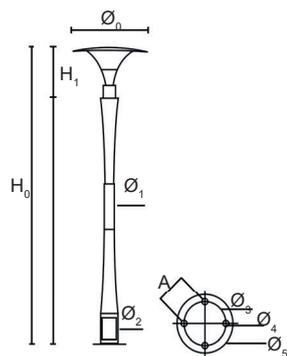

ORDERING CODE	H <sub>0</sub>	H <sub>1</sub>	Ø <sub>0</sub>	Ø <sub>1</sub>	Ø <sub>2</sub>
40-GREENSTAR-16001	3500	600	700	87	160

**BASE**


A	Ø <sub>3</sub>	Ø <sub>4</sub>	Ø <sub>5</sub>
156	300	220	20x40

Dimensions are in mm

**ORDERING GUIDE**

40-GREENSTAR-16001-30-830	30W
40-GREENSTAR-16001-30-840	30W
40-GREENSTAR-16001-30-865	30W

**ORDERING EXAMPLE**

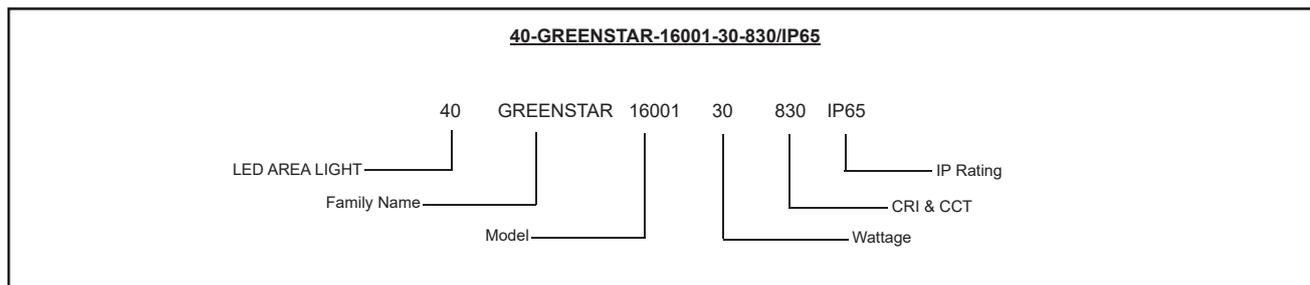

LED AREA LIGHT GREENSTAR-16001-30-830/IP65