40-GREENSTAR



LED AREA LIGHT

4 37	Housing	Die-cast aluminum
	Diffuser	Clear glass
	Light Source	Osram
	Finish Color	Black / Grey / White / Customize
	Benefits -	UV-proof powder coating finish
		High intensity and corrosion protected stainless steel fastener
	-	High luminous efficiency
	-	Energy efficient

EN 60598

(IP65||IK08|

DESCRIPTION

The GREENSTAR series combines the good looks with state-of-the-art performance and a design that meets the need of today's environment. It takes advantage to adapt on its surroundings to highlight the objective in conjunction with its maintenance-friendly features.

APPLICATION

Suitable for remote areas such as urban streets, parks, squares, gardens & villas.

SPECIFICATION

	40-GREENSTAR 17814 50W	
LED Chip	Osram	
LED Driver	Built-in	
Wattage	50W	
Lumen@Source*	6500 lm	
CCT**	3000K / 4000K / 6500K	
CRI (Ra)	>80 and 3 SDCM	
LED Life	50,000 hrs / L70	
Working Ambient Temperature	55°C	


*Luminous Flux tolerance $\pm 5\%$ / **CCT Tolerance $\pm 5\%$



40-GREENSTAR

LED AREA LIGHT



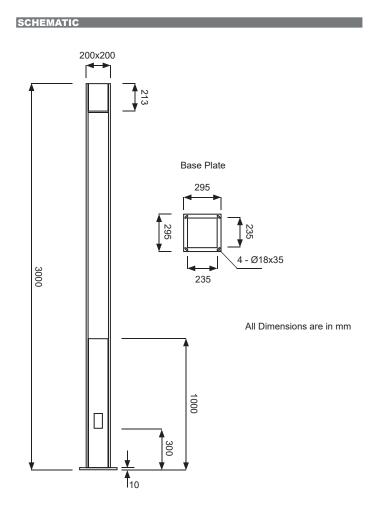

ORDERING GUIDE

40-GREENSTAR-17814-50-830	50W
40-GREENSTAR-17814-50-840	50W
40-GREENSTAR-17814-50-865	50W

ORDERING EXAMPLE 40-GREENSTAR-17814-50-830/IP65 40 GREENSTAR 17814 50 830 IP65 LED AREA LIGHT Family Name Model LED Module & Wattage

LED AREA LIGHT GREENSTAR-17814-50-830/IP65