

40-GREENSTAR

LED AREA LIGHT

EN
60598

IP65

IK08

F





220-240V
50 / 60 Hz

PF
≥ 0.9



Housing	M.S. Tube RHS Hot dip Galvanised
Diffuser	Clear PC
Benefits	<ul style="list-style-type: none">- UV-proof powder coating finish- High intensity and corrosion protected stainless steel fastener- High luminous efficiency- Energy efficient

DESCRIPTION

The GREENSTAR series combines the good looks with state-of-the-art performance and a design that meets the need of today's environment. It takes advantage to adapt on its surroundings to highlight the objective in conjunction with its maintenance-friendly features.

APPLICATION

Suitable for remote areas such as urban streets, parks, squares, gardens & villas.

SPECIFICATION


	40-GREENSTAR 17821 50W
LED Chip	Lumiled
LED Driver	Built-in
Wattage	50W
Lumen@Source*	6500 lm
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>70 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	55°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.



SCHEMATIC

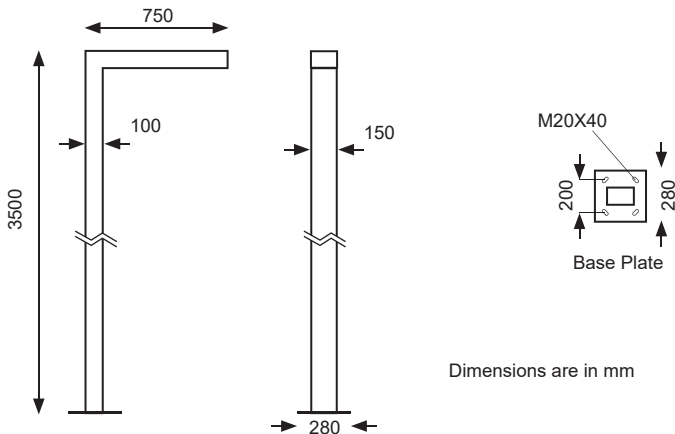

ORDERING GUIDE

40-GREENSTAR-17821-50-730	50W
40-GREENSTAR-17821-50-740	50W
40-GREENSTAR-17821-50-765	50W

ORDERING EXAMPLE

40-GREENSTAR-17821-50-730/IP65

LED AREA LIGHT

Family Name

Model

40 GREENSTAR 17821

50 730 IP65

IP Rating

CRI & CCT

LED Module & Wattage

LED AREA LIGHT GREENSTAR-17821-50-730/IP65