

40-GREENSTAR

LED AREA LIGHT



Housing Die-cast aluminum

Diffuser Opal PC / PMMA

Light Source Osram / Bridgelux

Benefits

- UV-proof powder coating finish
- Thermostable silica gasket
- High intensity and corrosion protected stainless steel fastener
- High luminous efficiency
- Energy efficient

DESCRIPTION

The GREENSTAR series combines the good looks with state-of-the-art performance and a design that meets the need of today's environment. It takes advantage to adapt on its surroundings to highlight the objective in conjunction with its maintenance-friendly features.

APPLICATION

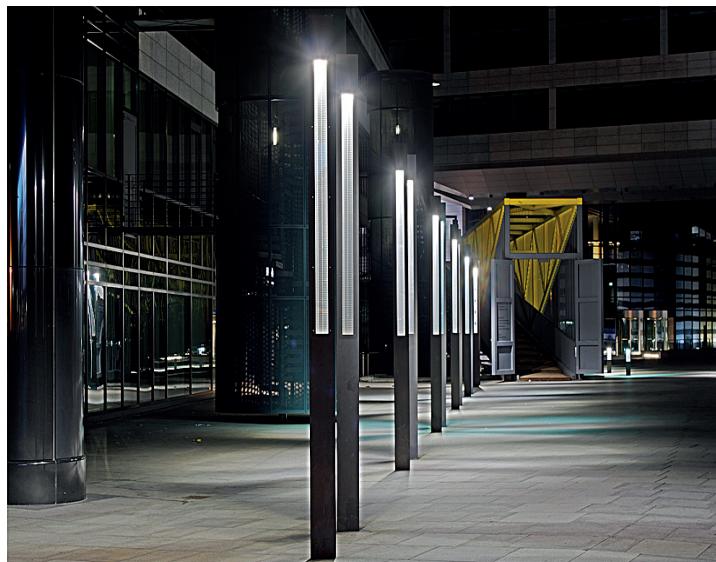
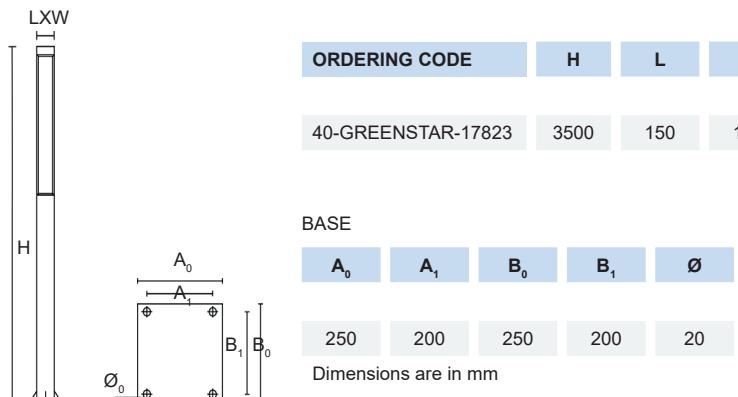
Suitable for remote areas such as urban streets, parks, squares, gardens & villas.

SPECIFICATION

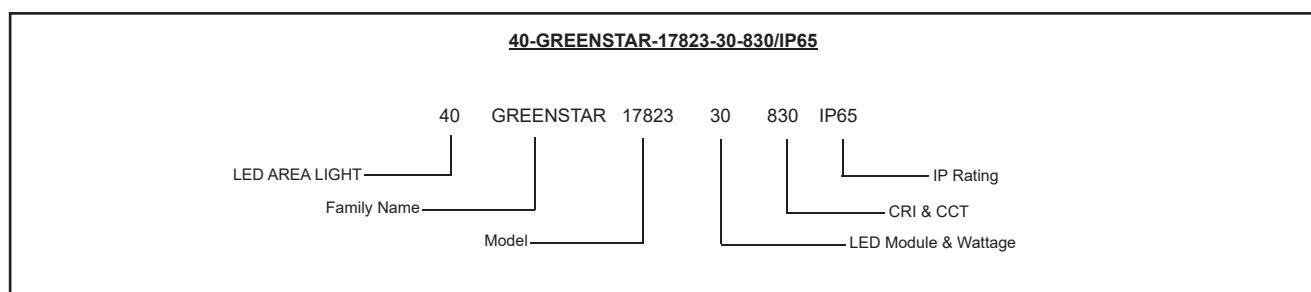
40-GREENSTAR 17823		40-GREENSTAR 17823	
	30W		50W
LED Chip	Osram / Bridgelux	Osram / Bridgelux	
LED Driver	Built-in	Built-in	
Wattage	30W	50W	
Lumen@Source*	3900 lm	6500 lm	
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K	
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM	
LED Life	50,000 hrs / L70	50,000 hrs / L70	
Working Ambient Temperature	55°C	55°C	

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.


SCHEMATIC

ORDERING GUIDE

40-GREENSTAR-17823-30-830	30W	40-GREENSTAR-17823-50-830	50W
40-GREENSTAR-17823-30-840	30W	40-GREENSTAR-17823-50-840	50W
40-GREENSTAR-17823-30-865	30W	40-GREENSTAR-17823-50-865	50W

ORDERING EXAMPLE


LED AREA LIGHT GREENSTAR-17823-30-830/IP65

Data is subject to change without notice.