

# 40-GREENSTAR

## LED AREA LIGHT



|                     |   |
|---------------------|---|
| <b>Housing</b>      | Die-cast aluminum   |
| <b>Diffuser</b>     | Clear PMMA  |
| <b>Light Source</b> | Osram / Bridgelux   |
| <b>Benefits</b>     | <ul style="list-style-type: none"> <li>- UV-proof powder coating finish</li> <li>- Thermostable silica gasket</li> <li>- High intensity and corrosion protected stainless steel fastener</li> <li>- High luminous efficiency</li> <li>- Energy efficient</li> </ul> |

### DESCRIPTION

The GREENSTAR series combines the good looks with state-of-the-art performance and a design that meets the need of today's environment. It takes advantage to adapt on its surroundings to highlight the objective in conjunction with its maintenance-friendly features.

### APPLICATION

Suitable for remote areas such as urban streets, parks, squares, gardens & villas.

### SPECIFICATION


| 40-GREENSTAR 17825          |                       |
|-----------------------------|-----------------------|
| 30W                         |                       |
| LED Chip                    | Osram / Bridgelux     |
| LED Driver                  | Built-in              |
| Wattage                     | 30W                   |
| Lumen@Source*               | 3900 lm               |
| CCT**                       | 3000K / 4000K / 6500K |
| CRI (Ra)                    | >80 and 3 SDCM        |
| LED Life                    | 50,000 hrs / L70      |
| Working Ambient Temperature | 55°C                  |

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.



**SCHEMATIC**

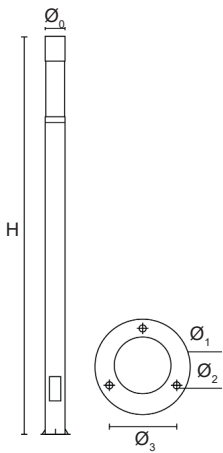

| ORDERING CODE | H | Ø <sub>0</sub> |
|---------------|---|----------------|
|---------------|---|----------------|

|                    |      |     |
|--------------------|------|-----|
| 40-GREENSTAR-17825 | 3500 | 157 |
|--------------------|------|-----|

Dimensions are in mm

BASE


| Ø <sub>1</sub> | Ø <sub>2</sub> | Ø <sub>3</sub> |
|----------------|----------------|----------------|
|----------------|----------------|----------------|

|     |    |     |
|-----|----|-----|
| 265 | 20 | 185 |
|-----|----|-----|

**ORDERING GUIDE**

|                           |     |
|---------------------------|-----|
| 40-GREENSTAR-17825-30-830 | 30W |
| 40-GREENSTAR-17825-30-840 | 30W |
| 40-GREENSTAR-17825-30-865 | 30W |

**ORDERING EXAMPLE**

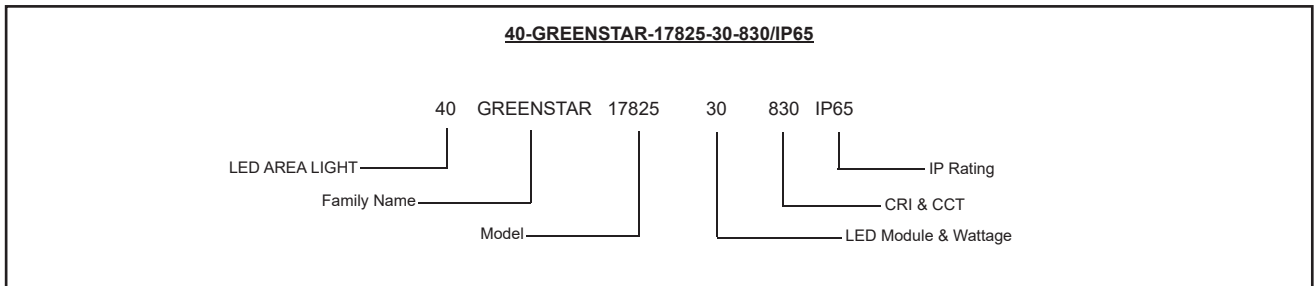

LED AREA LIGHT GREENSTAR-17825-30-830/IP65