42-BULKSTAR



LED BULKHEAD

0 0	Housing Diffuser	Die-cast aluminum
2091	Light Source	Opal polycarbonate Lite-Tech LED module pow- ered by Samsung / Lumiled
203	Benefits - - -	Easy to install Energy efficient Uniform illumination with high visual comfort High luminous efficiency
B B B B B B B B B B B B B B B B B B B		

EN 60598 \F/

IP65 IK09

DESCRIPTION

A series of high quality LED fixtures that comes in different shapes and sizes, wall mounted bulkhead is a combination of aesthetic design and optimum illumination performance ideal for numerous indoor and outdoor applications.

APPLICATION

Suitable in areas such as entrances, corridors, balconies, perimeters, staircases, security areas.

SPECIFICATION

	42-BULKSTAR 2091	42-BULKSTAR 2093	
	15W	15W	
LED Chip	Samsung / Lumiled	Samsung / Lumiled	
LED Driver	Philips	Philips	
Wattage	15W	15W	
Lumen@Source*	1950 lm	1950 lm	
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K	
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM	
LED Life	50,000 hrs / L70	50,000 hrs / L70	
Working Ambient Temperature	55°C	55°C	

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%




42-BULKSTAR

LED BULKHEAD








ADDITIONAL OPTIONS










SCHEMATIC



ORDERING CODE	L	w	н
42-BULKSTAR-2091	280	180	95
42-BULKSTAR-2093	280	180	95
Dimensions are in mm			

ORDERING GUIDE


42-BULKSTAR-2091-LT*15-830	15W
42-BULKSTAR-2091-LT*15-840	15W
42-BULKSTAR-2091-LT*15-865	15W

42-BULKSTAR-2093-LT*15-830	15W
42-BULKSTAR-2093-LT*15-840	15W
42-BULKSTAR-2093-LT*15-865	15W

LT* LTS - SAMSUNG

LTP - LUMILED

ORDERING EXAMPLE

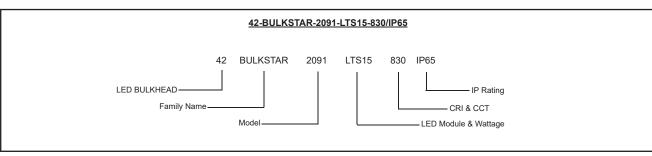

LED BULKHEAD BULKSTAR-2091-LTS15-830/IP65