

42-BULKSTAR

LED BULKHEAD



3124B



3125B



- Housing** Die-cast aluminum
- Diffuser** Opal polycarbonate
- Light Source** Lite-Tech LED module powered by Samsung / Lumiled
- Benefits**
 - Easy to install
 - Energy efficient
 - Uniform illumination with high visual comfort
 - High luminous efficiency

DESCRIPTION

A series of high quality LED fixtures that comes in different shapes and sizes, wall mounted bulkhead is a combination of aesthetic design and optimum illumination performance ideal for numerous indoor and outdoor applications.

APPLICATION

Suitable in areas such as entrances, corridors, balconies, perimeters, staircases, security areas.

SPECIFICATION

	42-BULKSTAR 3124B 20W	42-BULKSTAR 3125B 15W
LED Chip	Samsung / Lumiled	Samsung / Lumiled
LED Driver	Philips	Philips
Wattage	20W	15W
Lumen@Source*	2600 lm	1950 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	55°C	55°C



*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.





POLAR DIAGRAM

3124B





3125B



ADDITIONAL OPTIONS

- EL3 Emergency Kit - 3 hrs for 3124B
- DALI Digital Dimming for 3124B
- Black
- Silver grey
- White

SCHEMATIC



ORDERING CODE	L	W	H
42-BULKSTAR-3124B	363	363	120

Dimensions are in mm

ORDERING CODE	L	W	H
42-BULKSTAR-3125B	272	272	140


Dimensions are in mm

ORDERING GUIDE

42-BULKSTAR-3124B-LT*20-830	20W	42-BULKSTAR-3125B-LT*15-830	15W
42-BULKSTAR-3124B-LT*20-840	20W	42-BULKSTAR-3125B-LT*15-840	15W
42-BULKSTAR-3124B-LT*20-865	20W	42-BULKSTAR-3125B-LT*15-865	15W

- LT*
- LTS - SAMSUNG
- LTP - LUMILED

ORDERING EXAMPLE

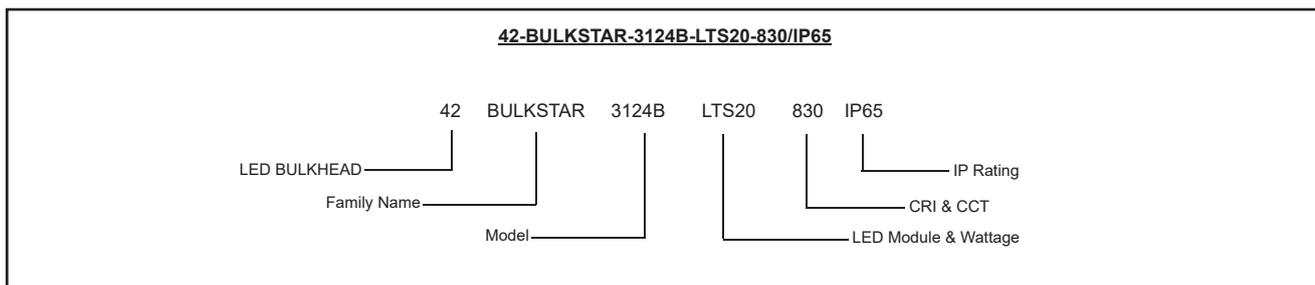

LED BULKHEAD BULKSTAR-3124B-LTS20-830/IP65