

43-FLOODSTAR

LED FLOODLIGHT



Housing	Die-cast aluminum alloy
Diffuser	Tempered glass
Light Source	SMD
Benefits	<ul style="list-style-type: none">- Adjustable projecting direction- Instant on/off- Excellent heat dissipation- 50% less power consumption than traditional light sources- Excellent consistency of light color- Easy to install and use- No UV or RF interference, no mercury or lead

DESCRIPTION

FLOODSTAR is a highly multi-purpose floodlight for the lighting of both outdoor and indoor installations wherever a compact design, environmental integration and a high protection degree required. Excellent lighting performance by well designed optical system.

APPLICATION


This flood light is widely used for areas like gardens, warehouse, workshop, billboards.

SPECIFICATION


	43-FLOODSTAR 128S1 56W
LED Chip	SMD
LED Driver	Philips
Wattage	56W
Lumen@Source*	7280 lm
CCT**	3000K / 4000K / 6500K
Beam Angle	60°
CRI (Ra)	>80 and 5 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	45°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.

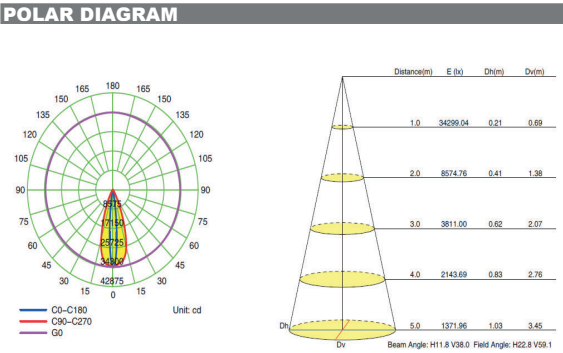

SCHEMATIC

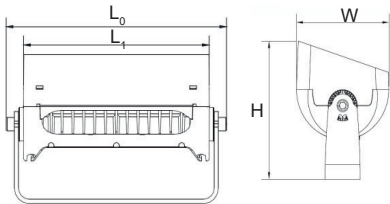

ORDERING CODE	L ₀	L ₁	W	H
43-FLOODSTAR 128S1	321	270	145	199

Dimensions are in mm

ORDERING GUIDE

43-FLOODSTAR 128S1-56-830	56W
43-FLOODSTAR 128S1-56-840	56W
43-FLOODSTAR 128S1-56-865	56W

ORDERING EXAMPLE

43-FLOODSTAR 128S1-56-830/IP66

43

FLOODSTAR 128S1

56

830

IP66

LED FLOODLIGHT

Family Name

Model

Wattage

CRI & CCT

IP Rating

LED FLOODLIGHT FLOODSTAR 128S1-56-830/IP66