

# 44-GROUNDSTAR

## LED INGROUND



- Housing** High pressure die-cast aluminum with stainless steel faceplate
- Diffuser** Toughened glass
- Light Source** Epistar
- Benefits**
  - Light body is designed to increase heat dissipation space
  - Instant on/off
  - Surface has an anti-corrosion capability
  - 50% less power consumption than traditional light sources
  - Precise optic design provides exceptional light control and precise distribution of light

### DESCRIPTION

GROUNDSTAR series are robust and compact luminaires use for outdoor applications. It provides ground level illumination by having the lights pointed up from the ground. The intent of such lights is to highlight points in the outdoor places such as architectural features or guide lights for walkways or paths.

### APPLICATION

This in-ground lights are mainly used for areas such as building façades, monuments, architectural marks, landscape.


### SPECIFICATION

**44-GROUNDSTAR 21030**  
**0.5W**


LED Chip	Epistar
LED Driver	DC 24V - Meanwell
LED Quantity	1 pc
Wattage	0.5W
Lumen@Source*	50 lm
CCT**	3000K / 4000K / 6500K
Beam Angle	120°
CRI (Ra)	>80
LED Life	50,000 hrs
Working Ambient Temperature	55°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.

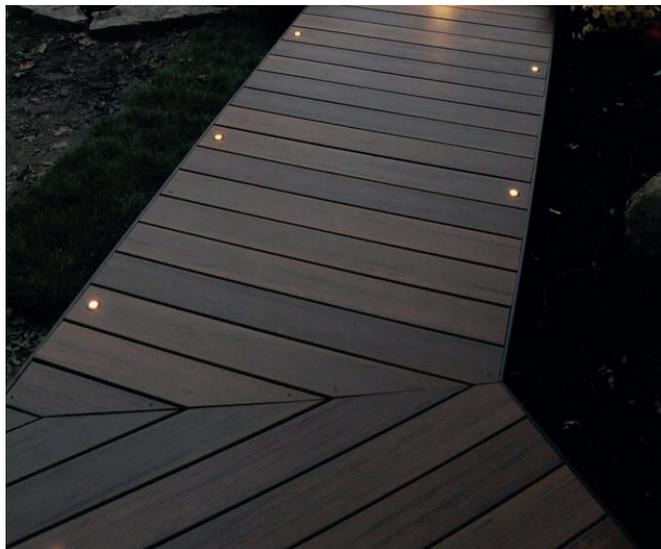

**SCHEMATIC**

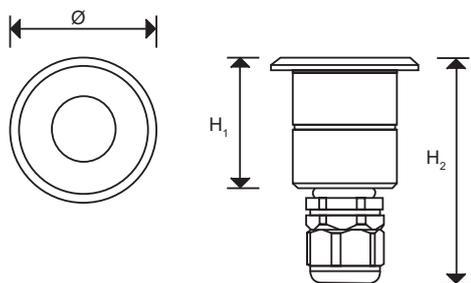


ORDERING CODE	Ø	H <sub>1</sub>	H <sub>2</sub>
44-GROUNDSTAR 21030	30	27	47

Dimensions are in mm

**ORDERING GUIDE**

44-GROUNDSTAR 21030-0.5-830	0.5W
44-GROUNDSTAR 21030-0.5-840	0.5W
44-GROUNDSTAR 21030-0.5-865	0.5W

**ORDERING EXAMPLE**

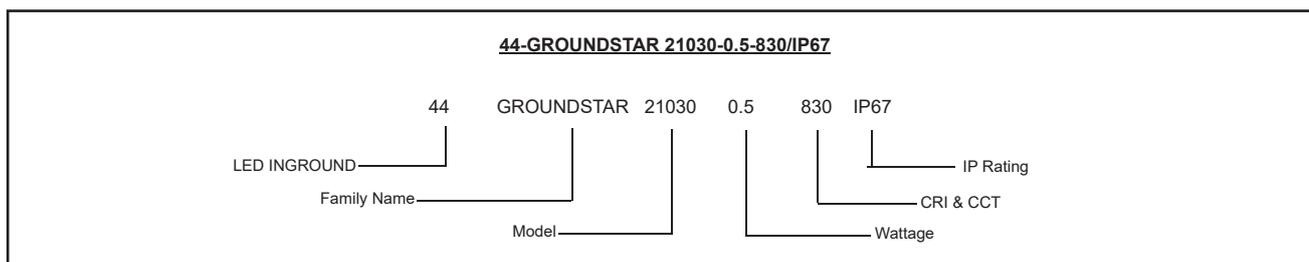

LED INGROUND GROUNDSTAR 21030-0.5-830/IP67

Data is subject to change without notice.