

44-GROUNDSTAR

LED INGROUND



Housing High pressure die-cast aluminum with stainless steel faceplate

Diffuser Toughened glass

Light Source Cree

Benefits

- Light body is designed to increase heat dissipation space
- Instant on/off
- Adjustable up to 15°
- Surface has an anti-corrosion capability
- 50% less power consumption than traditional light sources
- Precise optic design provides exceptional light control and precise distribution of light

Option RGB version available

DESCRIPTION

GROUNDSTAR series are robust and compact luminaires use for outdoor applications. It provides ground level illumination by having the lights pointed up from the ground. The intent of such lights is to highlight points in the outdoor places such as architectural features or guide lights for walkways or paths.

APPLICATION

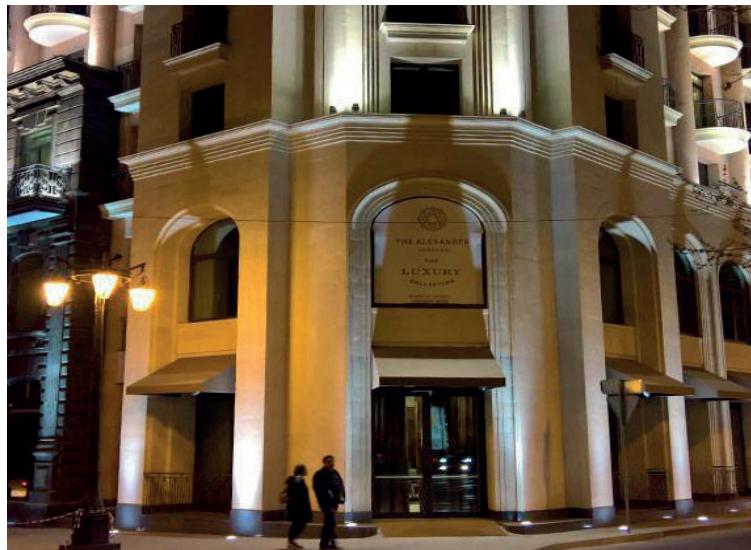
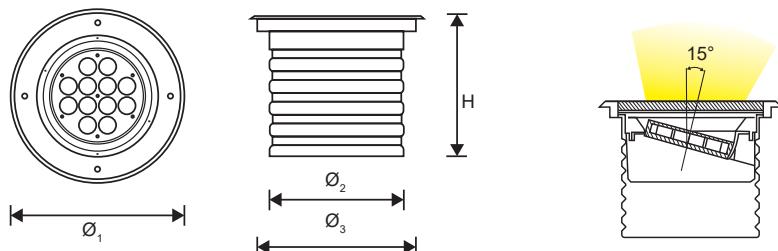
This inground lights are mainly used for areas such as building façades, monuments, architectural marks, landscape.

SPECIFICATION

	44-GROUNDSTAR 2105 42W	44-GROUNDSTAR 2105 60W
LED Chip	Cree	Cree
LED Driver	Built-in	Built-in
LED Quantity	12 pcs	12 pcs
Wattage	42W	60W
Lumen@Source*	5040 lm	7200 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
Beam Angle	8° / 12° / 20° / 30° / 60°	8° / 12° / 20° / 30° / 60°
CRI (Ra)	>80	>80
LED Life	50,000 hrs	50,000 hrs
Working Ambient Temperature	55°C	55°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.


SCHEMATIC

ORDERING CODE \varnothing_1 \varnothing_2 \varnothing_3 H

44-GROUNDSTAR 2105 330 243 301 265

Dimensions are in mm

ORDERING GUIDE

44-GROUNDSTAR 2105-42-830	42W	44-GROUNDSTAR 2105-60-830	60W
44-GROUNDSTAR 2105-42-840	42W	44-GROUNDSTAR 2105-60-840	60W
44-GROUNDSTAR 2105-42-865	42W	44-GROUNDSTAR 2105-60-865	60W

ORDERING EXAMPLE

44-GROUNDSTAR 2105-42-830/IP67						
LED INGROUND	44	GROUNDSTAR	2105	42	830	IP67

Family Name Model IP Rating CRI & CCT Wattage

LED INGROUND GROUNDSTAR 2105-42-830/IP67

Data is subject to change without notice.