

# 44-GROUNDSTAR

## LED INGROUND



<b>Housing</b>	High pressure die-cast aluminum with stainless steel faceplate
<b>Diffuser</b>	Toughened glass
<b>Light Source</b>	Cree
<b>Benefits</b>	<ul style="list-style-type: none"> <li>- Light body is designed to increase heat dissipation space</li> <li>- Instant on/off</li> <li>- Surface has an anti-corrosion capability</li> <li>- 50% less power consumption than traditional light sources</li> <li>- Precise optic design provides exceptional light control and precise distribution of light</li> </ul>
<b>Option</b>	RGB version available

### DESCRIPTION

GROUNDSTAR series are robust and compact luminaires use for outdoor applications. It provides ground level illumination by having the lights pointed up from the ground. The intent of such lights is to highlight points in the outdoor places such as architectural features or guide lights for walkways or paths.

### APPLICATION



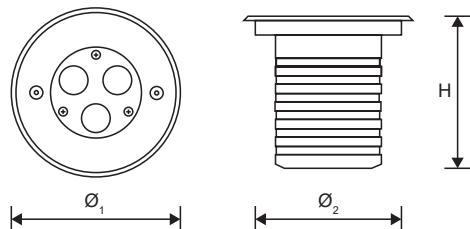
This inground lights are mainly used for areas such as building façades, monuments, architectural marks, landscape.

### SPECIFICATION

	44-GROUNDSTAR 2130 3.5W	44-GROUNDSTAR 2130 6W
LED Chip	Cree	Cree
LED Driver	DC 12V	DC 12V
LED Quantity	3 pcs	3 pcs
Wattage	3.5W	6W
Lumen@Source*	350 lm	600 lm
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
Beam Angle	5° / 8° / 12.5° / 20° / 30° / 45° / 60°	5° / 8° / 12.5° / 20° / 30° / 45° / 60°
CRI (Ra)	>80	>80
LED Life	50,000 hrs	50,000 hrs
Working Ambient Temperature	55°C	55°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.


**POLAR DIAGRAM**

**SCHEMATIC**

**ORDERING CODE**      **Ø<sub>1</sub>**      **Ø<sub>2</sub>**      **H**

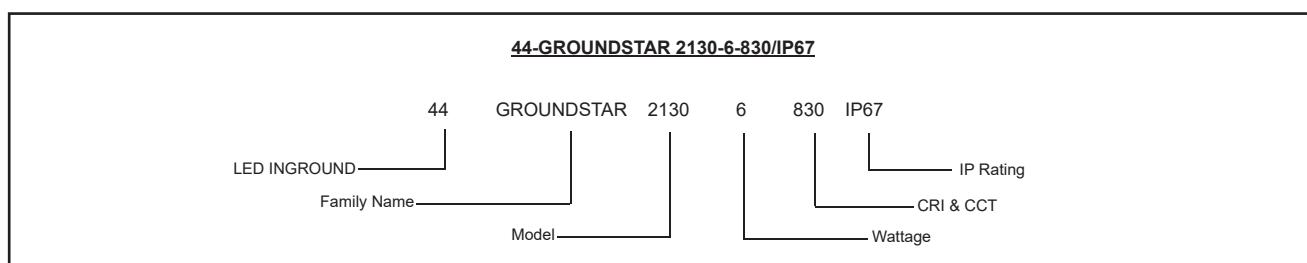
44-GROUNDSTAR 2130      110      96      100

Dimensions are in mm

**ORDERING GUIDE**

 44-GROUNDSTAR 2130-3.5-830      3.5W  
 44-GROUNDSTAR 2130-3.5-840      3.5W  
 44-GROUNDSTAR 2130-3.5-865      3.5W

 44-GROUNDSTAR 2130-6-830      6W  
 44-GROUNDSTAR 2130-6-840      6W  
 44-GROUNDSTAR 2130-6-865      6W

**ORDERING EXAMPLE**


LED INGROUND GROUNDSTAR 2130-6-830/IP67

Data is subject to change without notice.