

46-WALLSTAR

LED WALL WASHER



Housing	Extruded aluminum
Diffuser	Glass
Connections	male & female cable
Light Source	Cree
Benefits	<ul style="list-style-type: none"> - High quality water-proof connectors - Convection cooling - Strengthened glass, water-proof, dust-proof, anti leakage, and corrosion resistance - Strong, durable, and low power consumption - High efficiency environmental protection

DESCRIPTION

LED Wall washer illuminate surfaces for accent architectural purposes. With uniform brightness that reflects from the wall surfaces, it brings bright and soft light that is easy on the eyes and yet will definitely grab attention.

APPLICATION

Suitable for exterior walls, monuments and other areas that need accent lighting.

SPECIFICATION

	46-WALLSTAR 105 18W	46-WALLSTAR 105 24W
LED Chip	CREE	CREE
LED Driver	AC / DC 24V	AC / DC 24V
Wattage	18W	24W
Lumen@Source*	1800 lm	2400 lm
CCT**	2700K / 3000K / 4000K / 6500K	2700K / 3000K / 4000K / 6500K
Beam angle	60°	60°
CRI (Ra)	>80 and 5 SDCM	>80 and 5 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	55°C	55°C


*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.

*24V DC Optional



SCHEMATIC

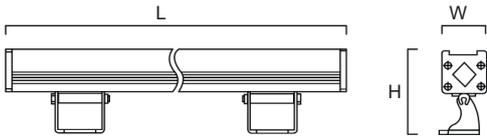


ORDERING CODE	L	W	H
46-WALLSTAR-105	1000	37	66

Dimensions are in mm

ORDERING GUIDE

46-WALLSTAR-105-18-827	18W	46-WALLSTAR-105-24-827	24W
46-WALLSTAR-105-18-830	18W	46-WALLSTAR-105-24-830	24W
46-WALLSTAR-105-18-840	18W	46-WALLSTAR-105-24-840	24W
46-WALLSTAR-105-18-865	18W	46-WALLSTAR-105-24-865	24W

ORDERING EXAMPLE

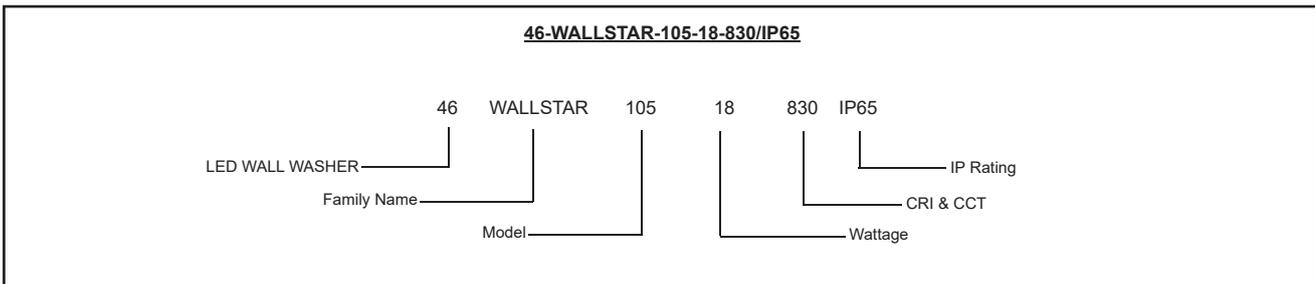

LED WALL WASHER WALLSTAR-105-18-830/IP65

Data is subject to change without notice.