



- Housing** Die-cast aluminum
- Reflector** Metal coated plastic
- Diffuser** PC lens
- Light Source** COB LED
- Benefits**
 - Breakthrough system cost
 - Good quality and light performance
 - Uniformity in lighting
 - Easy to install
 - Trimless



DESCRIPTION

A recessed mounted, cost-effective trimless spotlight that provides a clean and minimalist look as they are installed flush with the ceiling without any visible trim or bezel. This design seamlessly integrates with modern architectural aesthetics.

APPLICATION

Can be used in a wide range of applications from Residential to Commercial spaces.

SPECIFICATION


	32-TL73 10W	32-TL73 12W
LED Chip	Samsung / Philips	Samsung / Philips
LED Driver	Philips	Philips
Wattage	10W	12W
Lumen@Source*	1300 lm	1560 lm
Beam Angle	36°	36°
CCT**	3000K / 4000K / 6500K	3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM	>80 and 3 SDCM
LED Life	50,000 hrs / L70	50,000 hrs / L70
Working Ambient Temperature	50°C	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM

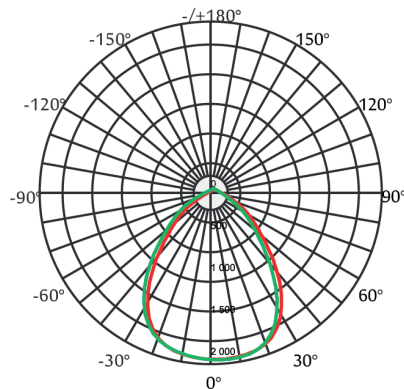

ADDITIONAL OPTIONS

- DALI Digital Dimming
- EL3 Emergency Kit - 3 hrs


SCHEMATIC

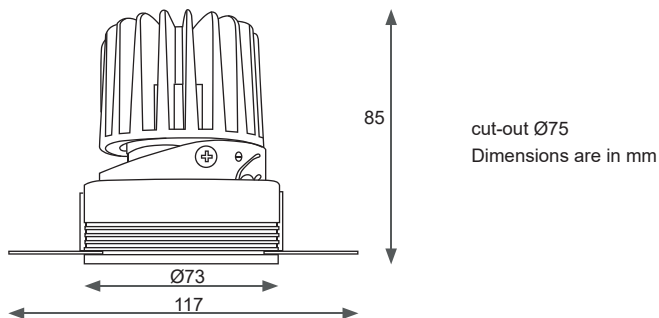

ORDERING GUIDE

32-TL73-10-830	10W	32-TL73-12-830	12W
32-TL73-10-840	10W	32-TL73-12-840	12W
32-TL73-10-865	10W	32-TL73-12-865	12W

ORDERING EXAMPLE

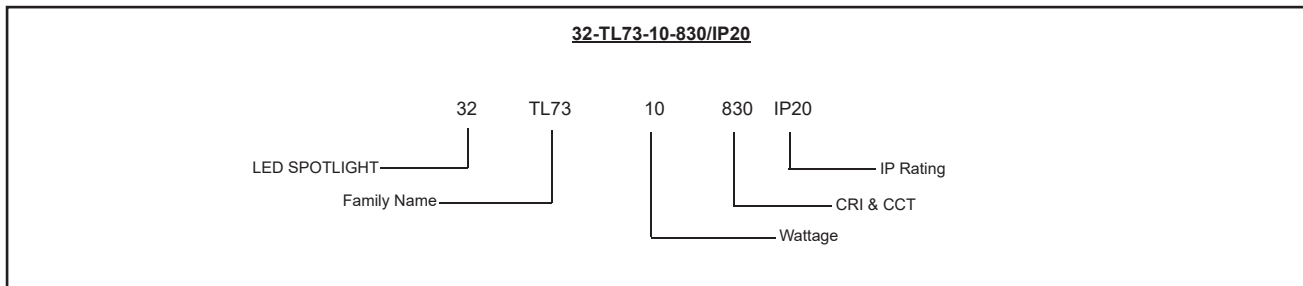

LED SPOTLIGHT TL73-10-830/IP20