

32-TL93

LED SPOTLIGHT



Housing Die-cast aluminum

Reflector Metal coated plastic

Diffuser PC lens

Light Source COB LED

Benefits

- Breakthrough system cost
- Good quality and light performance
- Uniformity in lighting
- Easy to install
- Trimless



DESCRIPTION

A recessed mounted, cost-effective trimless spotlight that provides a clean and minimalist look as they are installed flush with the ceiling without any visible trim or bezel. This design seamlessly integrates with modern architectural aesthetics.

APPLICATION

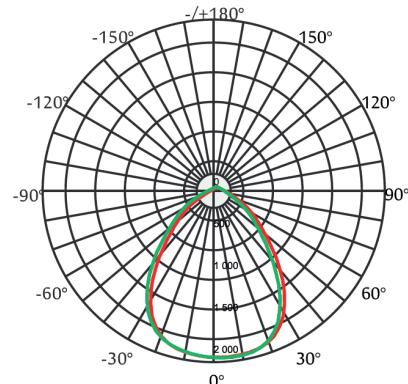
Can be used in a wide range of applications from Residential to Commercial spaces.

SPECIFICATION

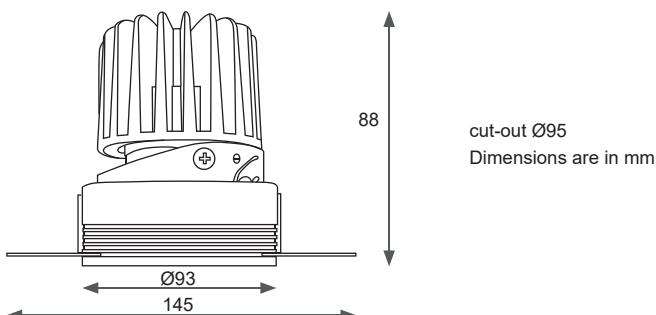
| | 32-TL93 15W | 32-TL93 20W |
|-----------------------------|-----------------------|-----------------------|
| LED Chip | Samsung / Philips | Samsung / Philips |
| LED Driver | Philips | Philips |
| Wattage | 15W | 20W |
| Lumen@Source* | 1950 lm | 2600 lm |
| Beam Angle | 36° | 45° |
| CCT** | 3000K / 4000K / 6500K | 3000K / 4000K / 6500K |
| CRI (Ra) | >80 and 3 SDCM | >80 and 3 SDCM |
| LED Life | 50,000 hrs / L70 | 50,000 hrs / L70 |
| Working Ambient Temperature | 50°C | 50°C |

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

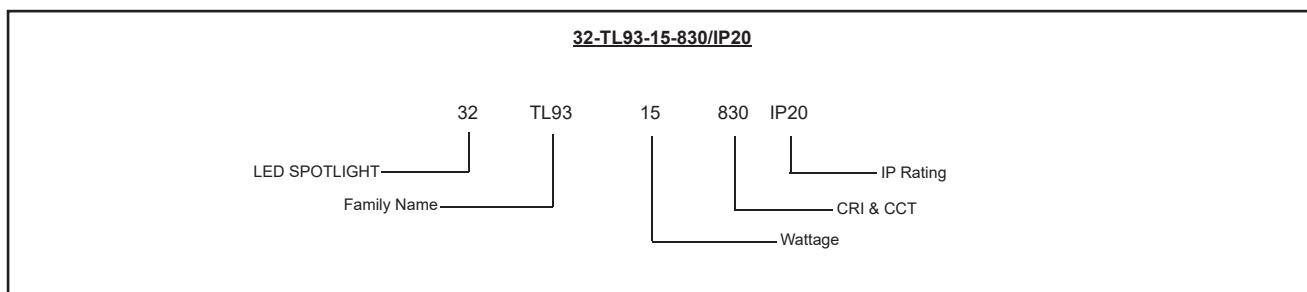
Data is subject to change without notice.


POLAR DIAGRAM

ADDITIONAL OPTIONS

DALI Digital Dimming EL3 Emergency Kit - 3 hrs

SCHEMATIC

ORDERING GUIDE

| | | | |
|----------------|-----|----------------|-----|
| 32-TL93-15-830 | 15W | 32-TL93-20-830 | 20W |
| 32-TL93-15-840 | 15W | 32-TL93-20-840 | 20W |
| 32-TL93-15-865 | 15W | 32-TL93-20-865 | 20W |

ORDERING EXAMPLE


LED SPOTLIGHT TL93-15-830/IP20

Data is subject to change without notice.