


# 43-TREELED

## LED FLOODLIGHT



- Housing** Die-cast aluminum + stainless steel ring
- Diffuser** Glass
- Light Source** Cree
- Benefits**
  - Adjustable projecting direction up or down
  - Instant on/off
  - Excellent heat dissipation
  - 50% less power consumption than traditional light sources
  - Excellent consistency of light color
  - maximum of 8 flood lights per ring
  - In-built driver

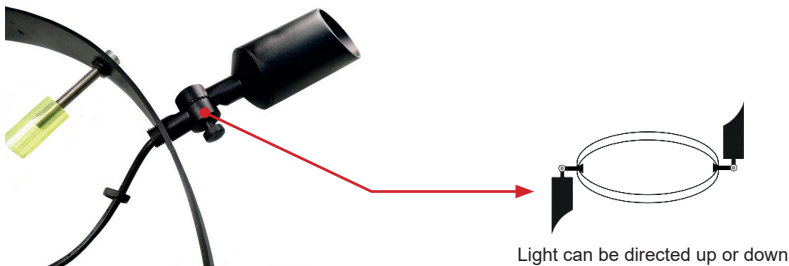

### APPLICATION

This LED light fixture is mainly use as an accent lighting for trees.

### SPECIFICATION


	43-TREELED 6W	43-TREELED 12W	43-TREELED 18W
LED Chip	CREE	CREE	CREE
Wattage	6W	12W	18W
Lumen@Source*	540 lm	1080 lm	1620 lm
CCT**	3000K / 5000K / RGB	3000K / 5000K / RGB	3000K / 5000K / RGB
Beam Angle	10° / 15° / 25° / 30° / 45° / 55°	10° / 15° / 25° / 30° / 45° / 55°	10° / 15° / 25° / 30° / 45° / 55°
CRI (Ra)	>80	>80	>80
LED Life	50,000 hrs	50,000 hrs	50,000 hrs
Working Ambient Temperature	55°C	55°C	55°C

\*Luminous Flux tolerance ±5% / \*\*CCT Tolerance ±5%

Data is subject to change without notice.



**SCHEMATIC**

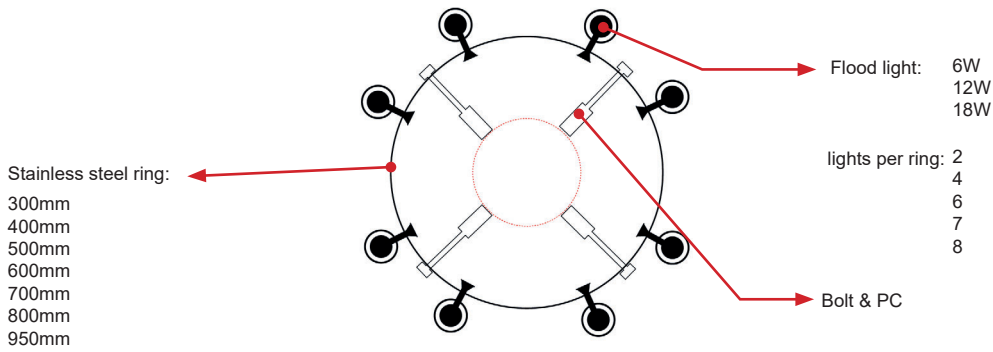


**ORDERING GUIDE**

43-TREELED -6xA-BBB-830	6W
43-TREELED -6xA-BBB-850	6W
43-TREELED -6xA-BBB-RGB	6W
43-TREELED -12xA-BBB-830	12W
43-TREELED -12xA-BBB-850	12W
43-TREELED -12xA-BBB-RGB	12W
43-TREELED -18xA-BBB-830	18W
43-TREELED -18xA-BBB-850	18W
43-TREELED -18xA-BBB-RGB	18W

A	-No. of Lights	BBB	-Ring size (mm)
	2		300
	4		400
	6		500
	7		600
	8		700
			800
			950

**ORDERING EXAMPLE**

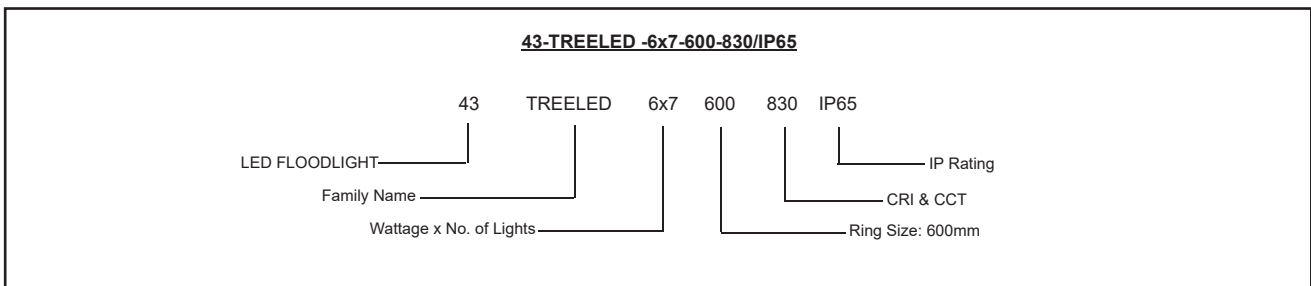

LED FLOODLIGHT TREELED -6x7-600-830/IP65