


30-ARCHLED 5035

LED RECESSED



Curved

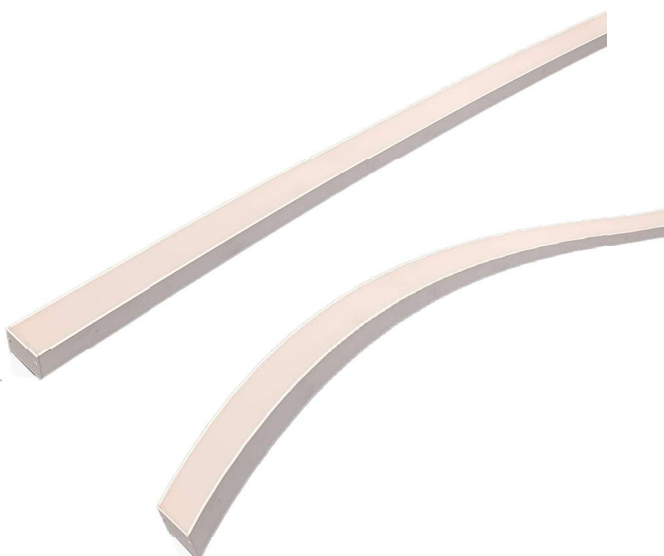

RGBW

- Housing** High purity extruded aluminum and anodized surface
- Diffuser** Silicon
- Light Source** Lite-Tech rigid / flexible LED module powered by Samsung / Lumiled
- Features**
 - Aesthetic design
 - Comfortable lighting appearance
 - High efficiency
 - Good look in corporate office
 - UGR<19

DESCRIPTION

The ARCHLED 5035 Linear Light Fixture is an extremely versatile solution for many indoor lighting needs. It is scalable sheet fixtures that can be both added to and moved along and are available in various lengths. Applicable in areas that require high performance such as galleries and retail areas. With a state of the art manufacturing process which convert this luminaire as a linear continuous mounting.

APPLICATION


Very versatile and can be used in a number of lighting applications such as office areas, Commercial spaces, corridors.

SPECIFICATION



	30-ARCHLED 5035 A06		30-ARCHLED 5035 A10		30-ARCHLED 5035 A15		30-ARCHLED 5035 A18		30-ARCHLED 5035 A24
	15W	20W	30W	40W	45W	60W	60W	75W	100W
LED Chip	Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled		Samsung / Lumiled
LED Driver	Philips/Tridonic/LTECH		Philips/Tridonic/LTECH		Philips/Tridonic/LTECH		Philips/Tridonic/LTECH		Philips/Tridonic/LTECH
Wattage	15W	20W	30W	40W	45W	60W	60W	75W	100W
Lumen@Source*	1950 lm	2600 lm	3900 lm	5200 lm	5850 lm	7800 lm	7800 lm	9750 lm	13000 lm
CCT**	3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K		3000K / 4000K / 6500K
CRI (Ra)	>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM		>80 and 3 SDCM
LED Life	50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70		50,000 hrs / L70
Working Ambient Temperature	50°C		50°C		50°C		50°C		50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.




POLAR DIAGRAM



ADDITIONAL OPTIONS

- ☐ 1-10V Analog Dimming
- ☐ DALI Digital dimming
- ☐ DMX Decoder
- ☐ EL3 Emergency Kit - 3hrs (Remote)

SCHEMATIC



ORDERING CODE

ORDERING CODE	L	W	H
30-ARCHLED 5035-A06	600	50	35
30-ARCHLED 5035-A10	1000	50	35
30-ARCHLED 5035-A15	1500	50	35
30-ARCHLED 5035-A18	1800	50	35
30-ARCHLED 5035-A24	2400	50	35

Dimensions are in mm

ORDERING GUIDE

30-ARCHLED 5035-A06-LT*15	830	840	865	15W	30-ARCHLED 5035-A18-LT*60	830	840	865	60W
30-ARCHLED 5035-A06-LT*20	830	840	865	20W	30-ARCHLED 5035-A18-LT*75	830	840	865	75W
30-ARCHLED 5035-A10-LT*30	830	840	865	30W	30-ARCHLED 5035-A24-LT*100	830	840	865	100W
30-ARCHLED 5035-A10-LT*40	830	840	865	40W	30-ARCHLED 5035-A10-RGBW10	RGBW			10W
30-ARCHLED 5035-A15-LT*45	830	840	865	45W	LT*				
30-ARCHLED 5035-A15-LT*60	830	840	865	60W	LTS - SAMSUNG				
					LTP - LUMILED				

ORDERING EXAMPLE

30-ARCHLED 5035-A06-LTP15-830/IP44

LED RECESSED — 30 — ARCHLED 5035 — A06 — LTP15 — 830 — IP44

Family Name — Model — LED Module & Wattage — IP Rating

LED RECESSED ARCHLED 5035-A06-LTP15-830/IP44