

41-BURJSTAR

LED BOLLARD



Housing	Die-cast aluminum
Diffuser	Clear glass
Light Source	Osram / Bridgelux
Benefits	<ul style="list-style-type: none"> - Easy to install - Energy efficient - Uniform illumination with high visual comfort - High luminous efficiency

DESCRIPTION

BURJSTAR is a modern, functional, robust, low maintenance bollard luminaire to illuminate walkways and pathways as well as to separate things or to direct pedestrian or vehicle traffic.

APPLICATION

Commonly used in landscape, walkways, gardens, parking areas, open areas.

SPECIFICATION


41-BURJSTAR 1626	
10W	
LED Chip	Osram / Bridgelux
LED Driver	Built-in
Wattage	10W
Lumen@Source*	1300 lm
CCT**	3000K / 6000K
CRI (Ra)	>80 and 3 SDCM
LED Life	50,000 hrs / L70
Working Ambient Temperature	55°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%

Data is subject to change without notice.



SCHEMATIC

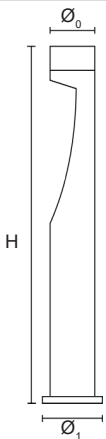


ORDERING CODE	Ø ₀	H	Ø ₁
41-BURJSTAR-1626	140	1000	192

Dimensions are in mm

ORDERING GUIDE

41-BURJSTAR-1626-10-830	10W
41-BURJSTAR-1626-10-860	10W

ORDERING EXAMPLE

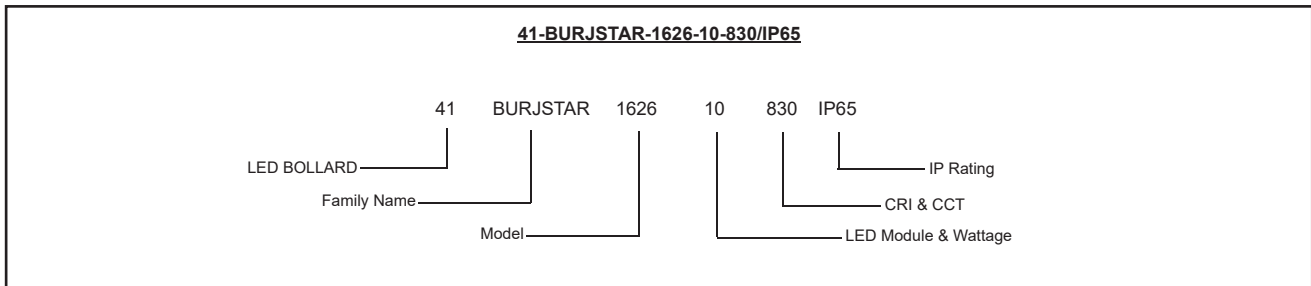

LED BOLLARD BURJSTAR-1626-10-830/IP65