

36-LTNEONFLEX F16

LED FLEXIBLE STRIPLIGHT

EN
60598

IP68

IK08

F











PF
≥ 0.9



Material	PVC
Features	<ul style="list-style-type: none">- UV resistant- Waterproof- Dirt resistant- Easy to install- Durable- Sets the mood- Variety of uses- Available in various lamp colors such as Red, Green, Blue, and Amber

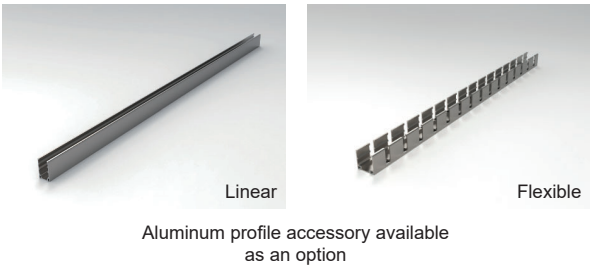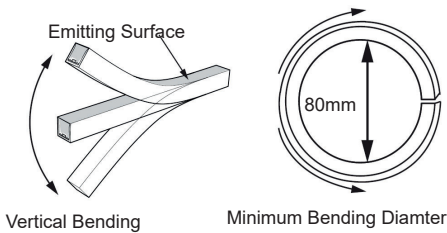

DESCRIPTION

LED flexible strip lights are reliable, cost-effective way to add extra light in any places you need. Because of its excellent choice for functionality, it can be used in various applications such as an accent light or as a decorative lighting solution which would also enhances the mood for the area.

APPLICATION

Mostly use in areas such as Leisure, office, residential, shops.

SPECIFICATION


	36-LTNEONFLEX F16 10W
LED Chip	SMD LED 2835
Supply Voltage	24V DC
LED Quantity	120 pcs / mtr
Wattage	10W / mtr
Beam Angle	120°
CCT**	3000K / 4000K / 6500K
CRI (Ra)	>80
LED Life	50,000 hrs
Min. Cutting Unit	12 LEDs
Min. Cutting Length	100 mm
Working Ambient Temperature	50°C

*Luminous Flux tolerance ±5% / **CCT Tolerance ±5%


Data is subject to change without notice.



SCHEMATIC

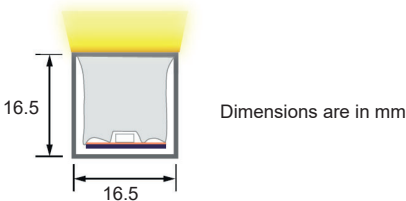

POLAR DIAGRAM

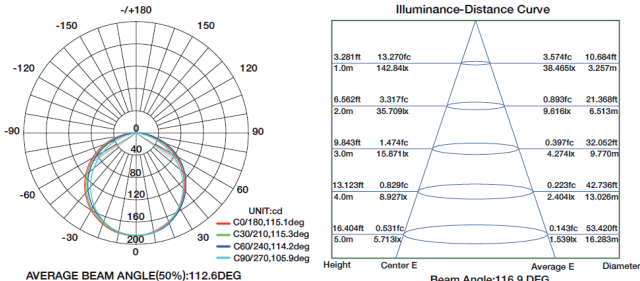

ADDITIONAL OPTIONS

- DALI

Digital Dimming
- AL-L

Aluminum Profile Mounting - Linear
- AL-F

Aluminum Profile Mounting - Flexible

LIGHT COLOR:

- Red

Green
- Blue

Amber

ORDERING GUIDE

36-LTNEONFLEX-F16-10-830	10W
36-LTNEONFLEX-F16-10-840	10W
36-LTNEONFLEX-F16-10-865	10W

ORDERING EXAMPLE

36-LTNEONFLEX-F16-10-830/IP68-10.5M

36

LTNEONFLEX

F16

10

830

IP68

10.5M

LED Flexible Striplight

Family Name

Model

Wattage

CRI & CCT

IP Rating

Length

LED FLEXIBLE STRIPLIGHT LTNEONFLEX-F16-10-830/IP68-10.5M